


# KELOX

## KMW489 KELOX-ULTRAX-W - STEELFIX adapter 25/22

71472ED0

### Areas of application

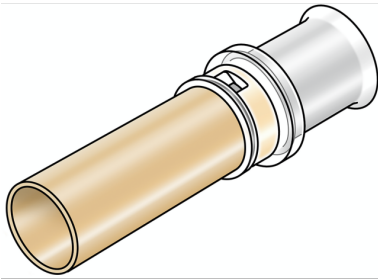

?Zeta value-optimised press-fit adapter, straight, Copperfix pipe dimension to KELOX, pressing socket, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing  
**ATTENTION!** Connection to pipe end only suitable as a compression fitting or press-fit connection!

## Approvals:



# Specifications

## Article information


port 1	Pressmuffe
port 2	Zapfen/Rohrende
design	gerade
press contour	U

## Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

## Product information

VPE1	5,00 SA1
VPE2	40,00 KT1
VPE3	3200,00 PAL
weight	0,059 KGM
text	KELOX-ULTRAX-W - STEELFIX adapter
INTRNR	74122000
main material group	KELOX
code	KMW489

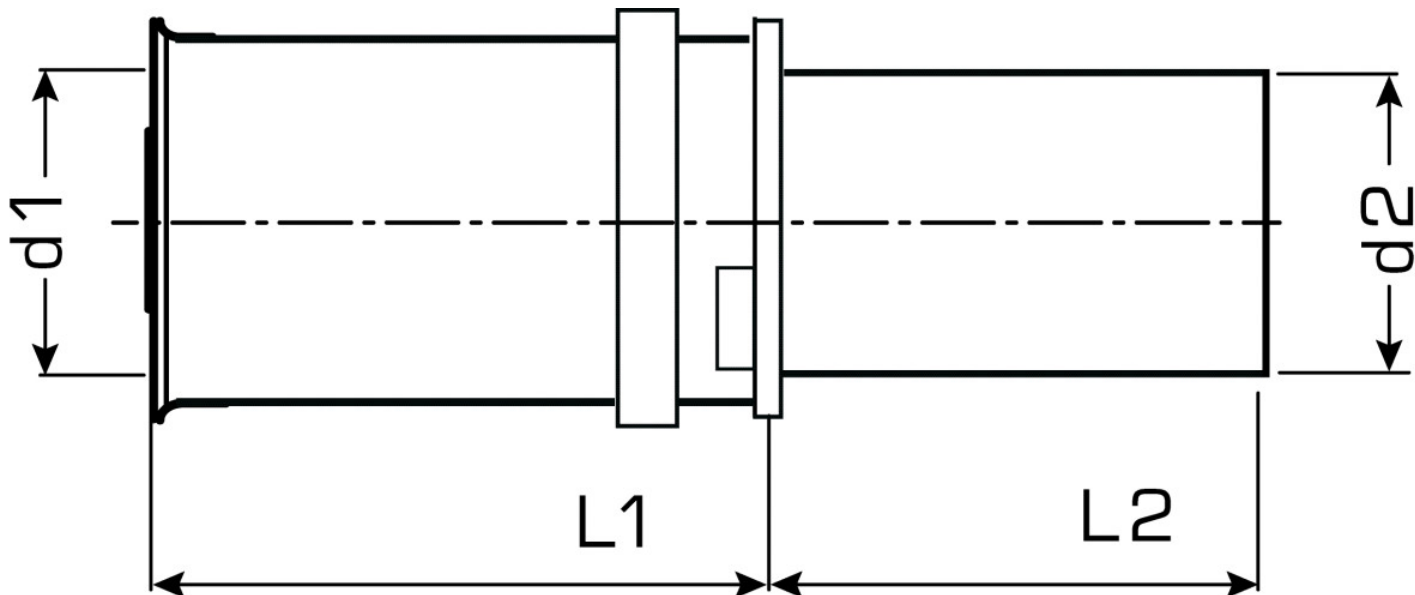

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm
71472ED0	25/22	25	22	30	43