


# KELOX

## KWW447 KELOX-WINDOW-W tee with branch female 20x1/2"

72440D02

### Areas of application

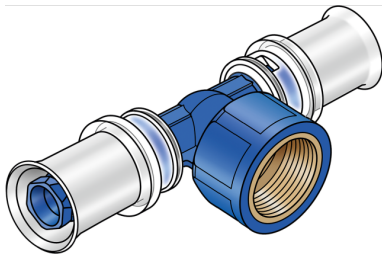

?Zeta value-optimised press-fit tee with female thread branch, made from PPSU, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

DO NOT screw in threaded pipes and cast iron fittings!

DO NOT use liquid sealants or thread sealing tapes!

## Approvals:



# Specifications

## Article information

port 1	Pressmuffe
port 2	Innengewinde zylindrisch BSPT-Rp (ISO 7-1 / EN 10226-1)
port 3	Pressmuffe
press contour	U

## Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

## Product information

VPE1	5,00 SA1
VPE2	20,00 KT1
VPE3	1440,00 PAL
weight	0,056 KGM
text	KELOX-WINDOWX-W tee with branch female
INTRNR	74122000
main material group	KELOX
code	KWW447

