


KELOX

KWW450 KELOX-WINDOW-W adapter with male thread 20x1/2"

72402D02

Areas of application

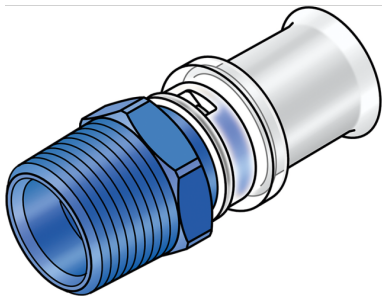

?Zeta value-optimised press-fit adapter elbow with female thread for sealing, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing
DO NOT use liquid sealants or thread sealing tapes!

Approvals:



Specifications

Article information


| | |
|---------------|--|
| port 1 | Pressmuffe |
| port 2 | Außengewinde konisch BSPT-R (ISO 7-1 / EN 10226-1) |
| design | gerade |
| press contour | U |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|--|
| VPE1 | 10,00 SA1 |
| VPE2 | 60,00 KT1 |
| VPE3 | 4320,00 PAL |
| weight | 0,024 KGM |
| text | KELOX-WINDOWX-W adapter with male thread |
| INTRNR | 74122000 |
| main material group | KELOX |
| code | KWW450 |

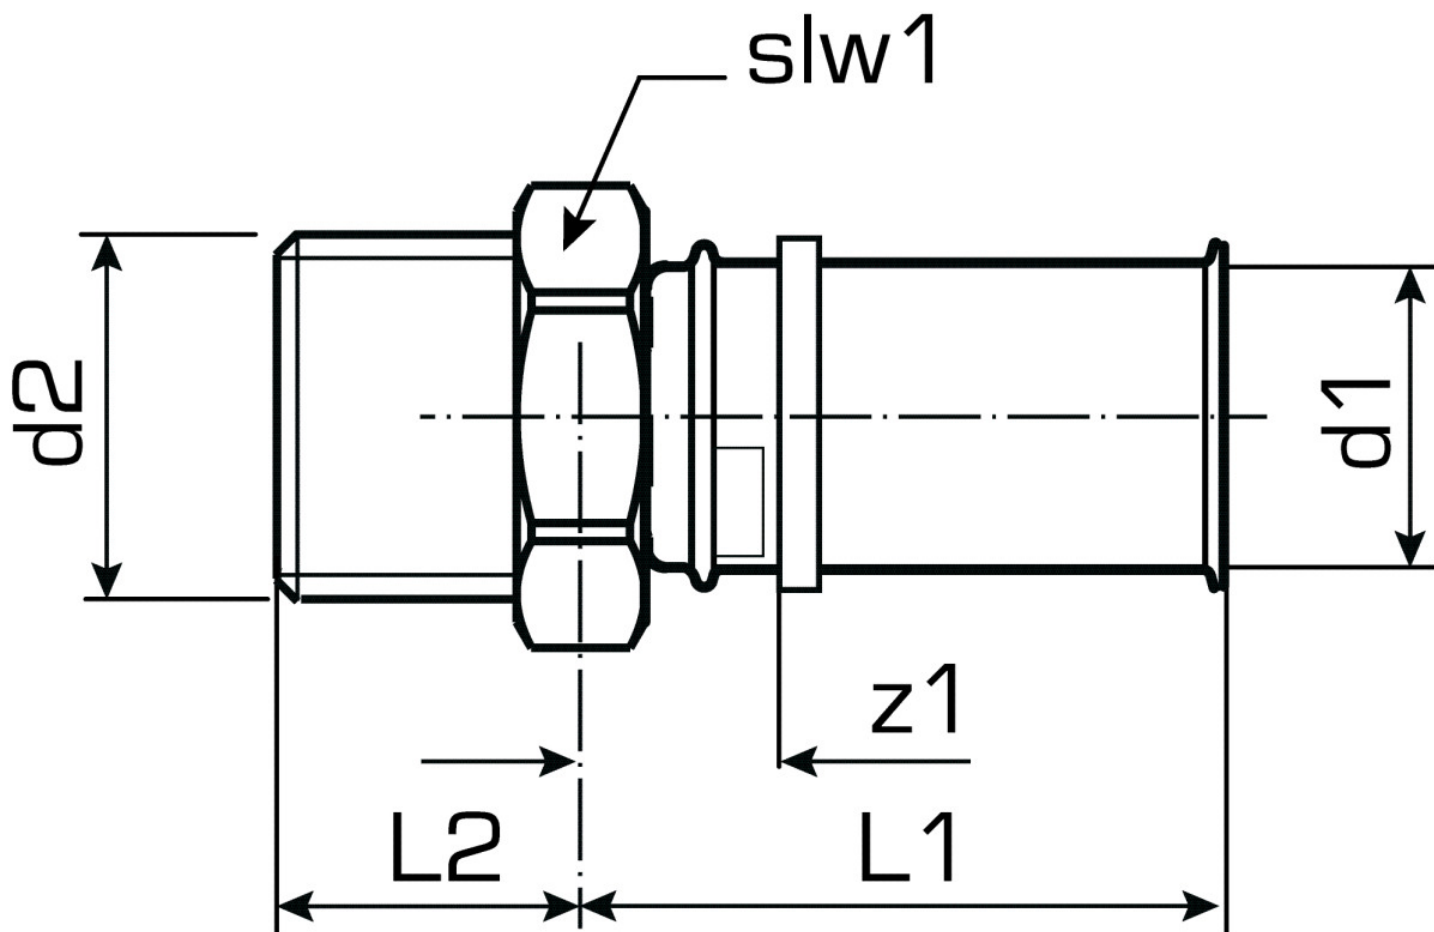

| Art. No | label | d2 | d1 mm | L1 mm | L2 mm |
|----------|---------|-----------|-------|-------|-------|
| 72402D02 | 20x1/2" | 1/2" (15) | 20 | 26 | 33 |