

# STEEL FIX C-STAHL

CP411 C-steel press-reduction socket  
male/female 54/42

54601HG0

## Areas of application



Press-reduction socket f/m straight made of C-steel coated with a zinc layer, incl. EPDM sealing components, d15-54 "leak before pressed"

Press contour: M

# Specifications

## Article information


|               |                 |
|---------------|-----------------|
| port 1        | Pressmuffe      |
| port 2        | Zapfen/Rohrende |
| execution     | 1-teilig        |
| design        | gerade          |
| press contour | M               |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |  |
|---------------------|--|
| VPE1                | 4 SA1                                      |
| VPE2                | 16 KT1                                     |
| VPE3                | 400 DDP                                    |
| weight              | 0,173 KGM                                  |
| text                | C-steel press-reduction socket male/female |
| INTRNR              | 73079980                                   |
| main material group | STEELFIX                                   |
| material group      | C-STAHL pressfittings                      |
| code                | CP411                                      |

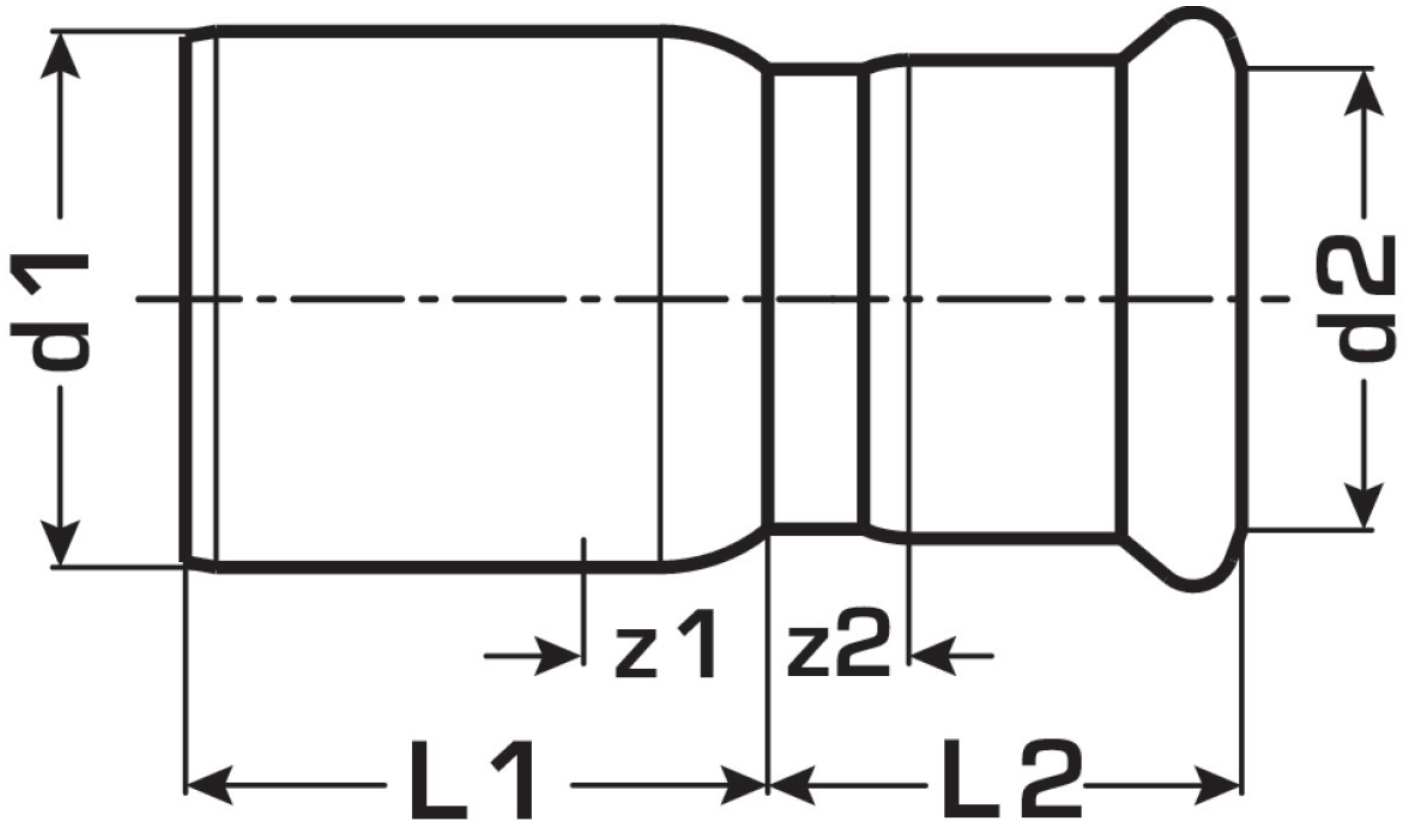

| Art. No  | label | d1 mm | d2 mm | L1 mm | L2 mm | z1 mm | z2 mm |
|----------|-------|-------|-------|-------|-------|-------|-------|
| 54601HG0 | 54/42 | 54    | 42    | 44    | 52    | 14    | 17    |