


STEEL FIX C-STAHL

CP415 C-Steel press-repair coupling 88,9

54605KK0

Areas of application

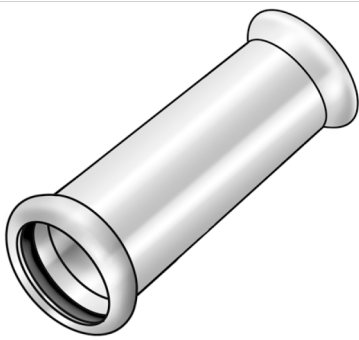

Press-fit repair coupling straight made of carbon steel coated with a zinc layer, incl. EPDM sealing components, d15-54 "leak before pressed"

Press contour: M

Specifications

Article information


| | |
|---------------|------------|
| port 1 | Pressmuffe |
| port 2 | Pressmuffe |
| execution | 1-teilig |
| design | gerade |
| press contour | M |

Technical properties

| | |
|------------------------------------|--------|
| insertion depth 1 (es1) | 70 mm |
| maximum working pressure at 20 ° C | 16 bar |

Product information

| | |
|---------------------|-------------------------------|
| VPE1 | 2 SA1 |
| weight | 1,32 KGM |
| text | C-Steel press-repair coupling |
| INTRNR | 73079980 |
| main material group | STEELFIX |
| material group | C-STAHL pressfittings |
| code | CP415 |

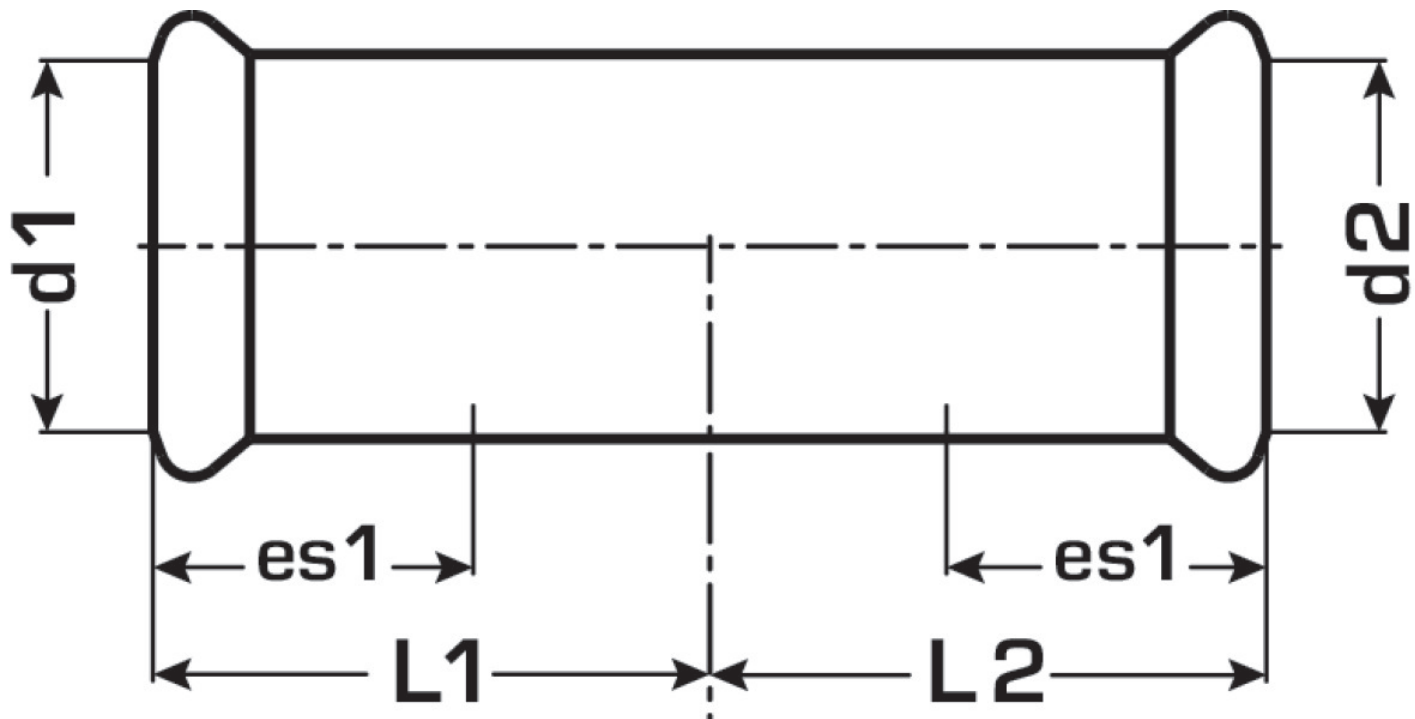

| Art. No | label | d1 mm | d2 mm | L1 mm | L2 mm | insertion depth 1 (es1) mm | Insertion depth 2 (es2) mm |
|----------|-------|-------|-------|-------|-------|----------------------------|----------------------------|
| 54605KK0 | 88,9 | 88.9 | 88.9 | 131 | 131 | 70 | 70 |