

# STEEL FIX C-STAHl

CP447 C-steel press-tee with branch female  
35x1/2"

54740F02

## Areas of application



Press-tee with threaded branch female made of C-steel coated with a zinc layer, incl. EPDM sealing components,

d15-54 "leak before pressed"

Press contour: M

# Specifications

## Article information


|               |                            |
|---------------|----------------------------|
| port 1        | Pressmuffe                 |
| port 2        | Innengewinde konisch (NPT) |
| port 3        | Pressmuffe                 |
| execution     | T-Stück                    |
| press contour | M                          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                                      |
|---------------------|--------------------------------------|
| VPE1                | 5 SA1                                |
| VPE2                | 20 KT1                               |
| VPE3                | 500 DDP                              |
| weight              | 0,189 KGM                            |
| text                | C-steel press-tee with branch female |
| INTRNR              | 73079980                             |
| main material group | STEELFIX                             |
| material group      | C-STAHL pressfittings                |
| code                | CP447                                |

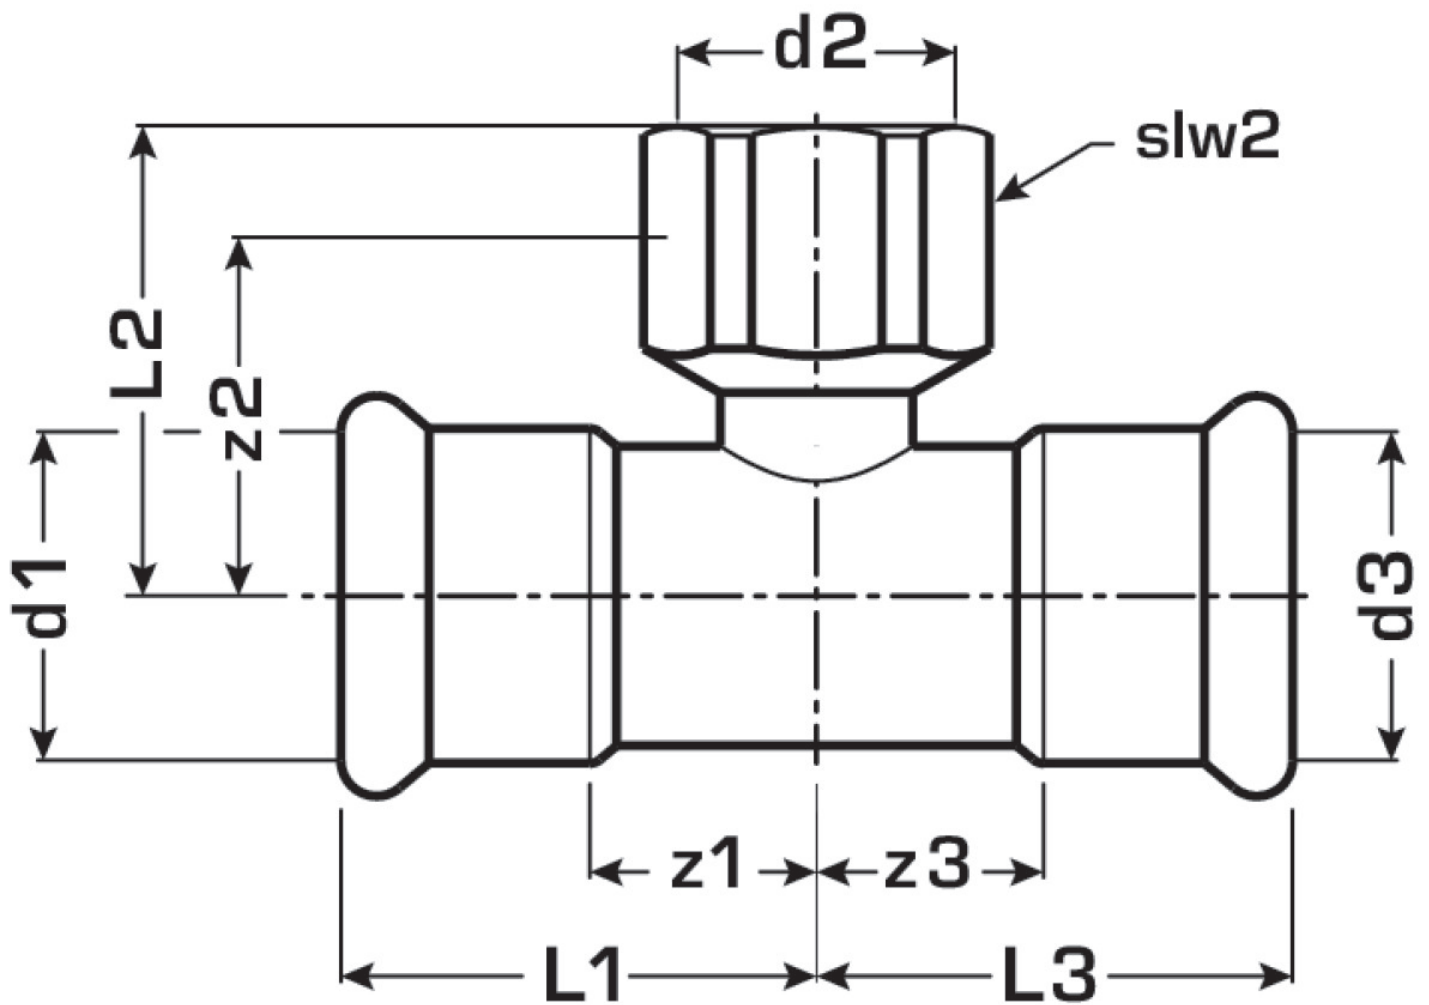

| Art. No  | label   | d2            | d1 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm | slw1 mm |
|----------|---------|---------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 54740F0: | 35x1/2" | 1/2 Zoll (15) | 35    | 35    | 52    | 46    | 52    | 26    | 31    | 26    | 28      |