


# STEEL FIX C-STAHl

CP451 C-steel press-union male 28x1"

54741E05

## Areas of application

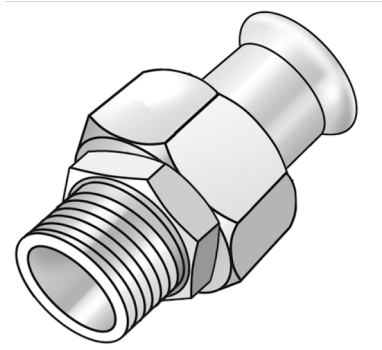

Press-fit union with male thread conforming to EN 10226-1 made of carbon steel coated with a zinc layer, incl. EPDM sealing components, d15-54 "leak before pressed"

Press contour: M

# Specifications

## Article information


|               |                            |
|---------------|----------------------------|
| port 1        | Pressmuffe                 |
| port 2        | Außengewinde konisch (NPT) |
| execution     | 1-teilig                   |
| design        | gerade                     |
| press contour | M                          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                          |
|---------------------|--------------------------|
| VPE1                | 2 SA1                    |
| VPE2                | 30 KT1                   |
| VPE3                | 750 DDP                  |
| weight              | 0,322 KGM                |
| text                | C-steel press-union male |
| INTRNR              | 73079980                 |
| main material group | STEELFIX                 |
| material group      | C-STAHl pressfittings    |
| code                | CP451                    |

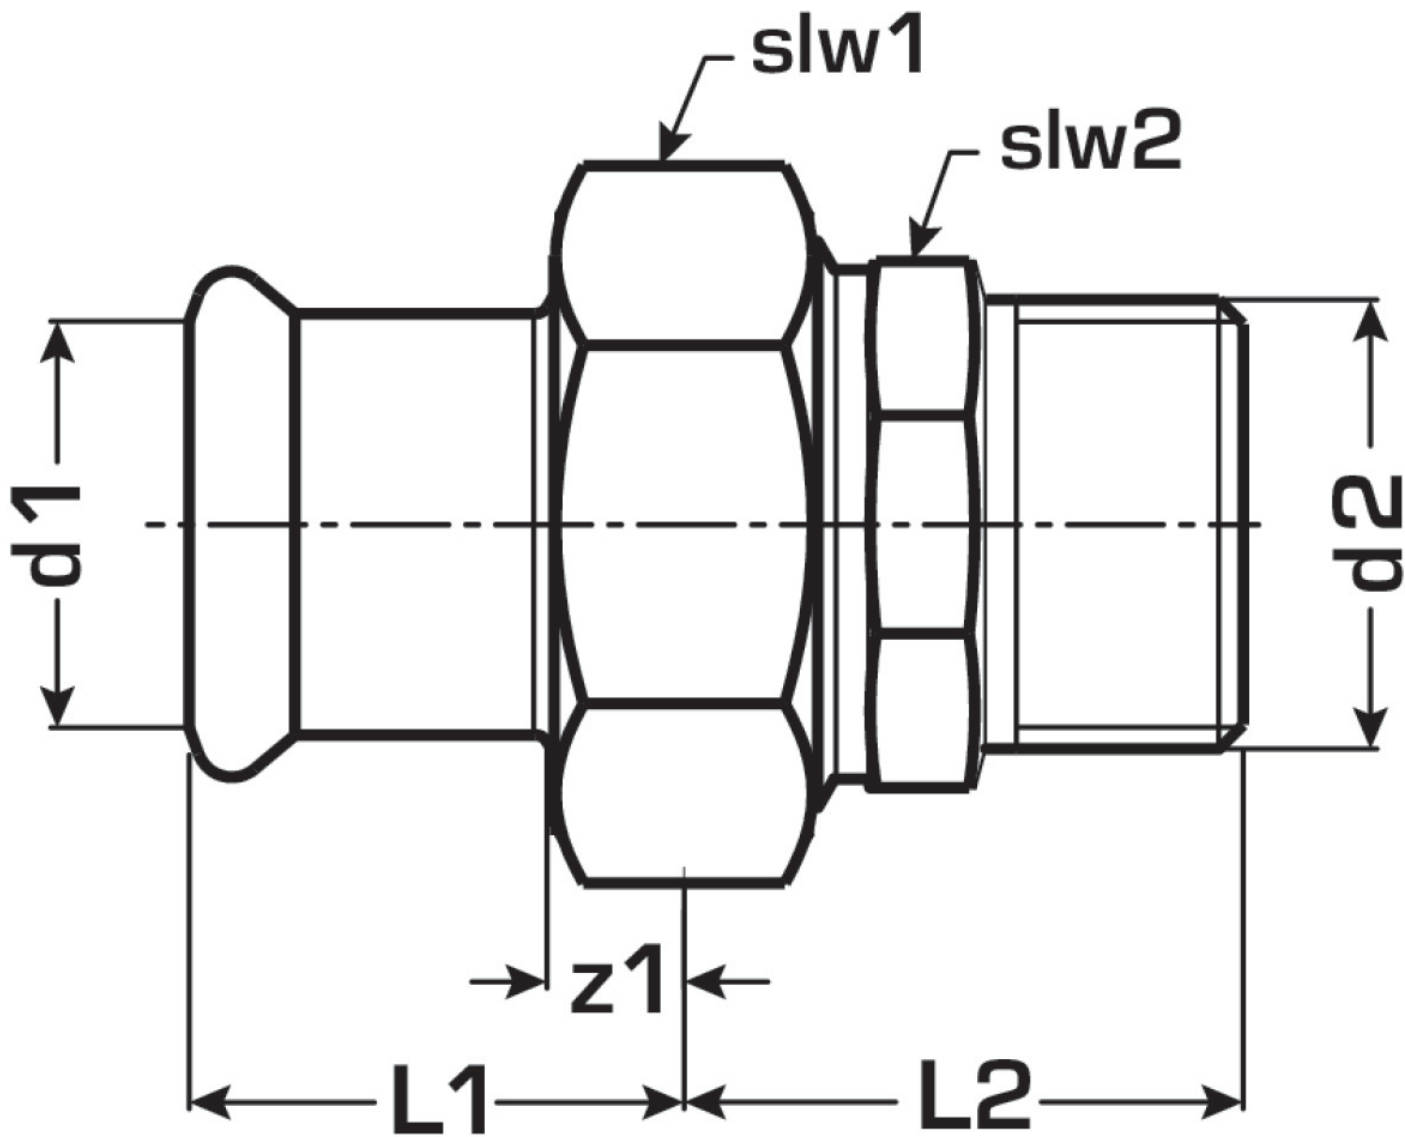

| Art. No  | label | d2             | d1 mm | L1 mm | L2 mm | z1 mm | slw1 mm | slw2 mm |
|----------|-------|----------------|-------|-------|-------|-------|---------|---------|
| 54741E05 | 28x1" | 1 Zoll<br>(25) | 28    | 31    | 44    | 8     | 53      | 45      |