


STEEL FIX C-STAHl

CP456 C-steel euro-screw fitting 15x3/4"

54744B04

Areas of application



Press-fit Euro thread fitting to connect installation components with 3/4" EURO CONE (male) conforming to DIN215 made of C-steel coated with a zinc layer, incl. EPDM sealing components, "leak before pressed"

Press contour: M

Specifications

Article information


| | |
|---------------|------------|
| port 1 | Pressmuffe |
| port 2 | Eurokonus |
| execution | 1-teilig |
| design | gerade |
| press contour | M |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|----------------------------|
| VPE1 | 10 SA1 |
| VPE2 | 100 KT1 |
| VPE3 | 2500 DDP |
| weight | 0,112 KGM |
| text | C-steel euro-screw fitting |
| INTRNR | 73079980 |
| main material group | STEELFIX |
| material group | C-STAHL pressfittings |
| code | CP456 |

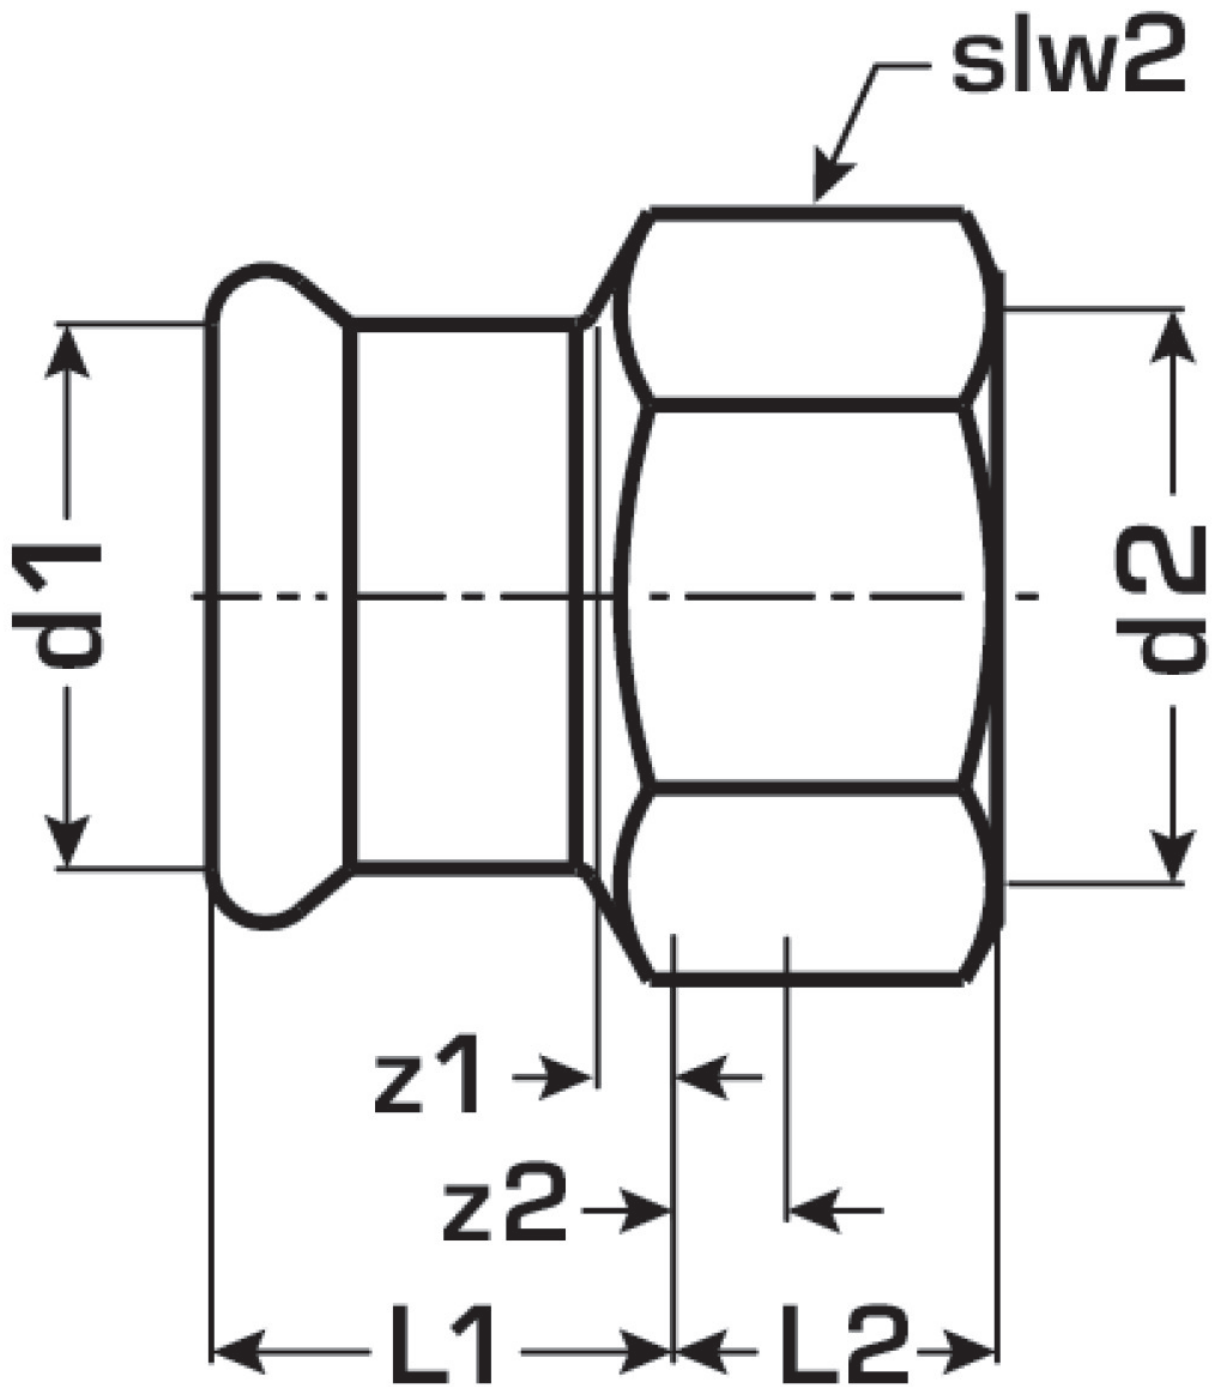

| Art. No | label | d2 | d1 mm | L1 mm | L2 mm | z1 mm | z2 mm | slw2 mm |
|----------|---------|------------------|-------|-------|-------|-------|-------|---------|
| 54744B04 | 15x3/4" | 3/4 Zoll (20) | 15 | 21 | 16 | 1 | 7 | 30 |