


# KELOX<sub>FB</sub>

## KM636K KELOX FB adhesive Velcro foil 6mm

6060510

### Areas of application

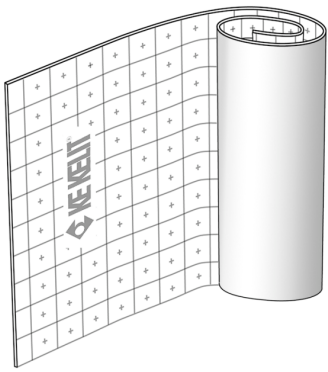

Extruded PE foam, closed-cell 100% HCFC- and HFC-free self-adhesive over the full surface area with laminated velours fabric for fixing KELOX-ULTRAX FB Velcro tubes and ULTRA PE-RT Velcro tubes without additional fastening.

With thin-layer heated screeds, you must only ever use the KELOX-ULTRAX FB Velcro tube!

Thickness: 6mm

Max. load-bearing capacity: 5 kN/m<sup>2</sup>

Footfall sound improvement factor approx. 13 dB

Thermal conductivity: 0.045 W/mK

Water vapour diffusion resistance: approx. 15,000 My

Supplied in coils: 20x1m

With thin-layer heated screeds, you must only ever use the KELOX-ULTRAX FB pipe!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

ATTENTION: Protect from direct sunlight, do not store outdoors!

Max. storage temperature 40°C!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

## Technical properties

**suitable for pipe diameter** 16 – 16 mm

## Product information

**VPE1** 20,00 KT1

**weight** 0,040 KGM

**text** KELOX FB adhesive Velcro foil

**INTRNR** 39211390

**code** KM636K

Art. No	label
---------	-------

6060510	6mm
---------	-----