


KELOX_{FB}

KM694K KELOX wireless room thermostat, digital
86x86x26,5mm

5881330

Areas of application

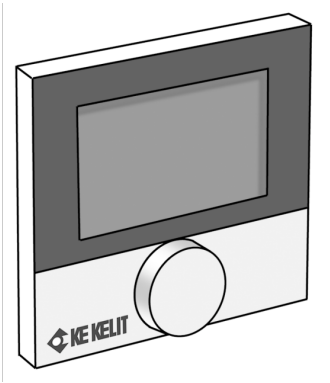

Surface-mount digital wireless room thermostat with backlit display as a signal transmitter to the KM695 bus wireless receiver and, in addition, to control 24V thermal motors; can also be used for programming the KM695 receiver; KM699 floor sensor can be connected

Hysteresis: +/- 0.3 K

Contact: 1 NCC

Setting range: 5°C - 30°C

Protection type/class: IP 20

Wireless frequency: 868 MHz

Power supply: 2xAAA Batteries (included)



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Size: 86x86x26.5mm

Colour: white (RAL 9003)

ATTENTION: Can only be operated in conjunction with the KM695 or KM695S!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information	
VPE1	1,00 KT1
VPE2	50,00 KT2
weight	0,110 KGM
text	KELOX wireless room thermostat, digital
INTRNR	90321020
code	KM694K

Art. No	label
5881330	86x86x26,5mm