


# KELOX<sub>FB</sub>

## KMP552 ?KELOX-PROTEC quick-push coupling 16

73175B00

### Areas of application

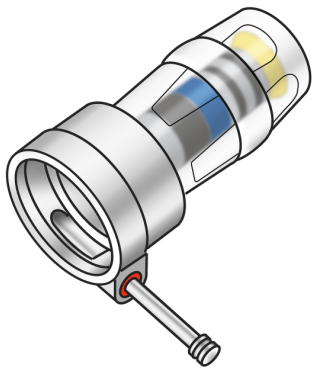

?Quick-push coupling, made of non-porous metal-plated brass, fits FB manifolds KMP590E, KMP590D and KMP590M, incl. support sleeves, O-rings, withdrawal barriers and a protector ring as an insertion locking device

### Approvals:



# Specifications

## Article information


port 1	Plug-in
port 2	Bayonet
execution	1-part
design	Straight

## Technical properties

insertion depth 1 (es1)	32,5 mm
maximum working pressure at 20 ° C	10 bar
PN	PN 10

## Product information

VPE1	10,00 SA1
VPE2	180,00 KT1
weight	0,062 KGM
text	?KELOX-PROTEC quick-push coupling
INTRNR	74122000
code	KMP552

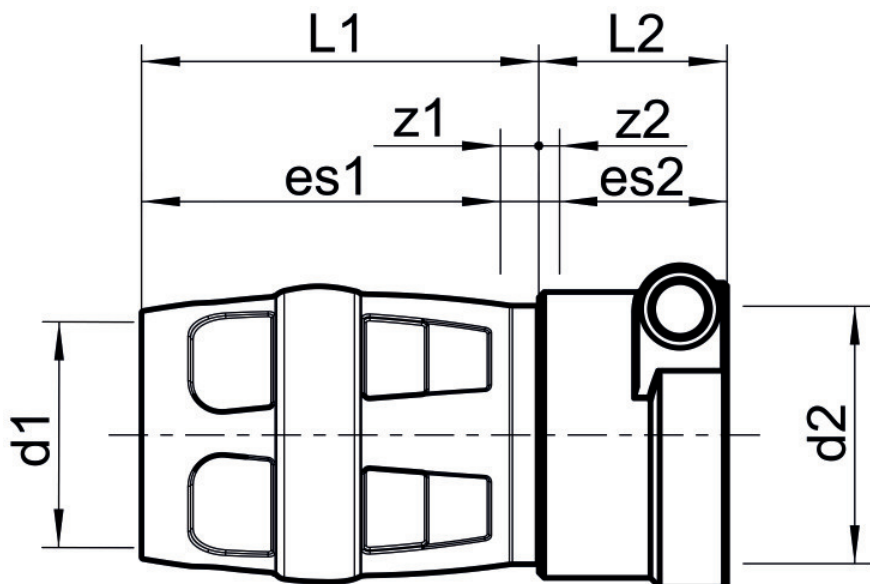

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	z1 mm	z2 mm	insertion depth 1 (es1) mm	Insertion depth 2 (es2) mm
73175B00	16	16	23,5	36	17	3,5	2	32,5	15