


TRI2002 KETRIX PE pipe - PN10 160x14.6

3019100

Areas of application

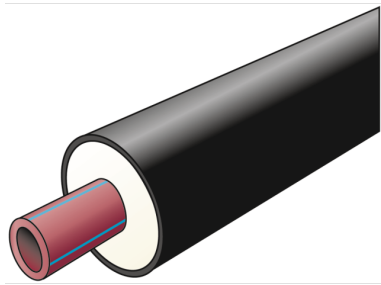

Pre-insulated industrial piping system based on ÖNORM EN ISO 15874

Medium pipe: d40-160 = TRI02, adhesion-pretreated

Application area: 20°C/10 bar - from -30°C to +30°C/8 bar

Insulation: PUR rigid foam

Jacket pipe: PE-HD

Length: 6m

Specifications

| Product information | |
|----------------------------|---------------------------------|
| casing DA | 250 |
| VPE1 | 6,00 STG |
| L | 6 m |
| weight | 13,160 KGM |
| text | KETRIX PE pipe - PN10 |
| INTRNR | 39172290 |
| main material group | KETRIX CX/PE |
| material group | KETRIX CX/PE pipes and fittings |
| code | TRI2002 |

| Art. No | label |
|---------|----------|
| 3019100 | 160x14.6 |