


# KELOX

## KMW448 KELOX-ULTRAX-W tee with branch male 20x1/2"

71442D2D

### Areas of application

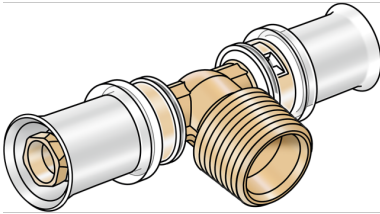

?Zeta value-optimised press-fit tee with male thread branch, made from dezincification-resistant, (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

### Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

## Article information


port 1	Pressmuffe
port 2	Außengewinde konisch BSPT-R (ISO 7-1 / EN 10226-1)
port 3	Pressmuffe
execution	T-Stück
press contour	U

## Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

## Product information

VPE1	10,00 SA1
VPE2	40,00 KT1
VPE3	2400,00 PAL
weight	0,115 KGM
text	KELOX-ULTRAX-W tee with branch male
INTRNR	74122000
main material group	KELOX
code	KMW448

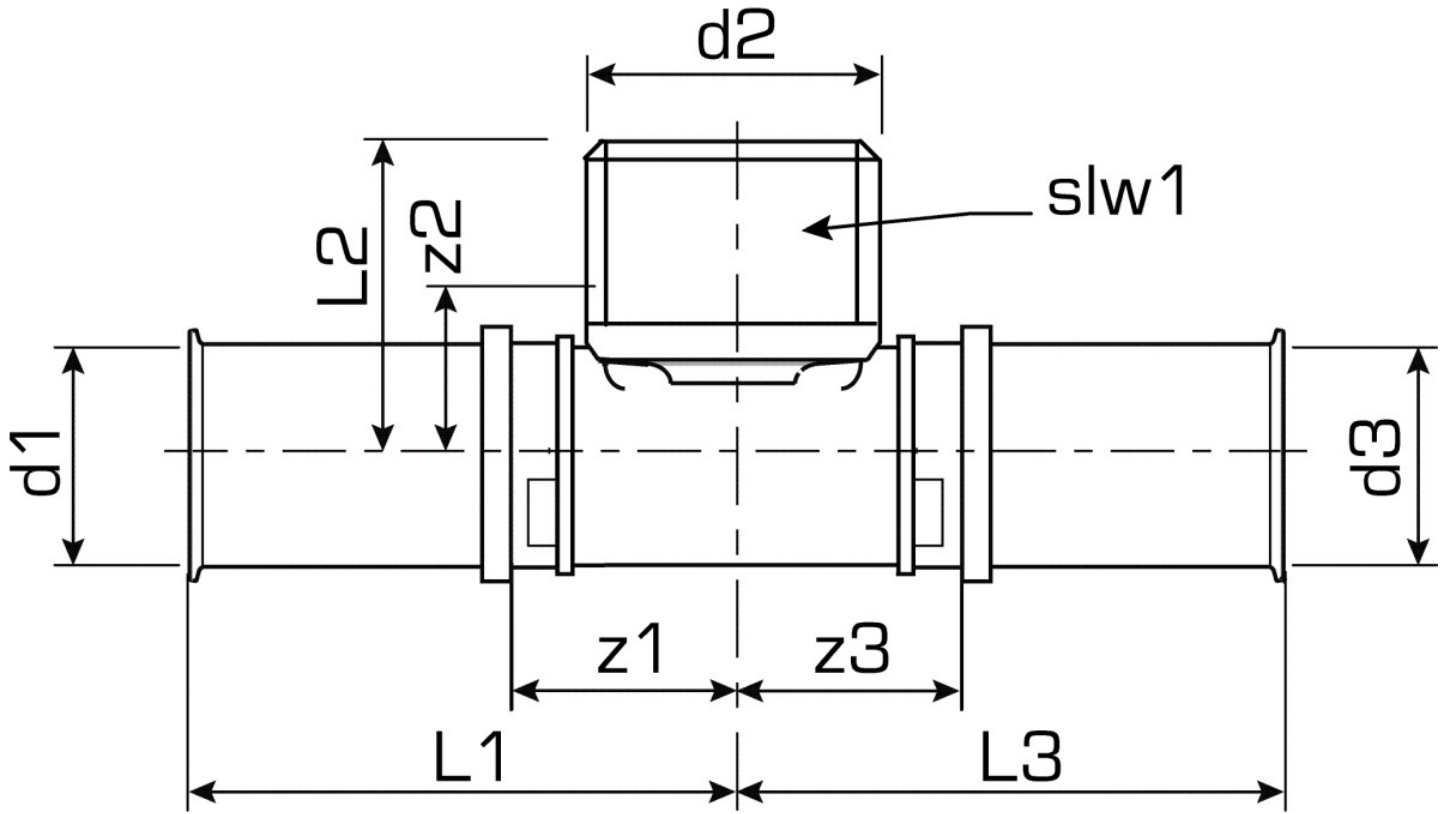

Art. No	label	d2	d1 mm	d3 mm	L1 mm	L3 mm	slw1 mm
71442D2D	20x1/2"	1/2" (15)	20	20	25,5	25,5	22