


# TRI1008 KETRIX-CX pipe - PN16 63x8.6

3019360

## Areas of application

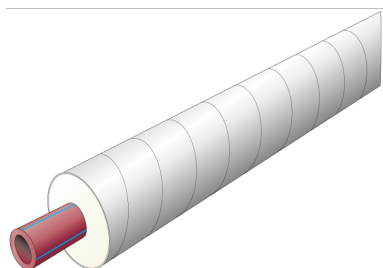

Pre-insulated industrial pipe system based on ÖNORM EN ISO 15874

Medium pipe: d20-110 = TRI08, adhesion-pretreated

Application area: 20°C/16 bar - from -30°C to +40°C/10 bar

Insulation: PUR rigid foam

Jacket pipe: 0.6 mm galvanised folded spiral sheet metal

Length: 6m

# Specifications

| Product information        |                                 |
|----------------------------|---------------------------------|
| <b>casing DA</b>           | 125                             |
| <b>VPE1</b>                | 6,00 STG                        |
| <b>L</b>                   | 6 m                             |
| <b>weight</b>              | 4,320 KGM                       |
| <b>text</b>                | KETRIX-CX pipe - PN16           |
| <b>INTRNR</b>              | 39172290                        |
| <b>main material group</b> | KETRIX CX/PE                    |
| <b>material group</b>      | KETRIX CX/PE pipes and fittings |
| <b>code</b>                | TRI1008                         |

| Art. No | label  |
|---------|--------|
| 3019360 | 63x8.6 |