


COPPER FIX

COF440 COPPERFIX copper press-tee 89/54/89

52630KHK

Areas of application

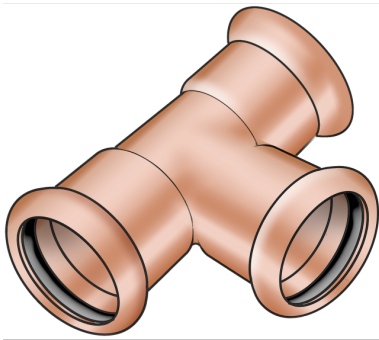

Press-tee equal or reduced made of copper, incl. EPDM sealing components, "leak before pressed"

Press contour: M

Approvals:



Specifications

Article information

| | |
|---------------|------------|
| port 1 | Pressmuffe |
| port 2 | Pressmuffe |
| port 3 | Pressmuffe |
| execution | T-Stück |
| angle | 90 ° |
| press contour | M |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|----------------------------|
| VPE1 | 1,00 SA1 |
| VPE2 | 8,00 KT1 |
| weight | 2,244 KGM |
| text | COPPERFIX copper press-tee |
| INTRNR | 74122000 |
| main material group | COPPERFIX |
| material group | KUPFER pressfittings |
| code | COF440 |



| Art. No | label | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 52630KH | 89/54/89 | 88,9 | 54 | 88,9 | 136 | 119 | 136 | 77 | 77 | 77 |