


COPPER FIX

COF447 COPPERFIX copper press-tee with branch female 28x3/4"

52740E04

Areas of application

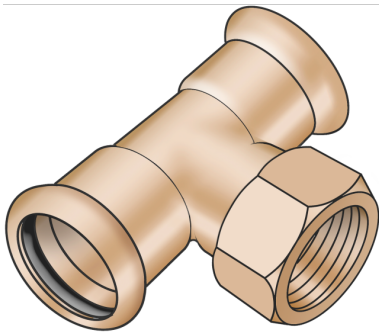

Press-tee with threaded branch female made of red brass, incl. EPDM sealing components, "leak before pressed"

Press contour: M

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Specifications

Article information


| | |
|---------------|----------------------------|
| port 1 | Pressmuffe |
| port 2 | Innengewinde konisch (NPT) |
| port 3 | Pressmuffe |
| execution | T-Stück |
| angle | 90 ° |
| press contour | M |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|---|
| VPE1 | 5,00 SA1 |
| VPE2 | 25,00 KT1 |
| weight | 0,199 KGM |
| text | COPPERFIX copper press-tee with branch female |
| INTRNR | 74122000 |
| main material group | COPPERFIX |
| material group | KUPFER pressfittings |
| code | COF447 |

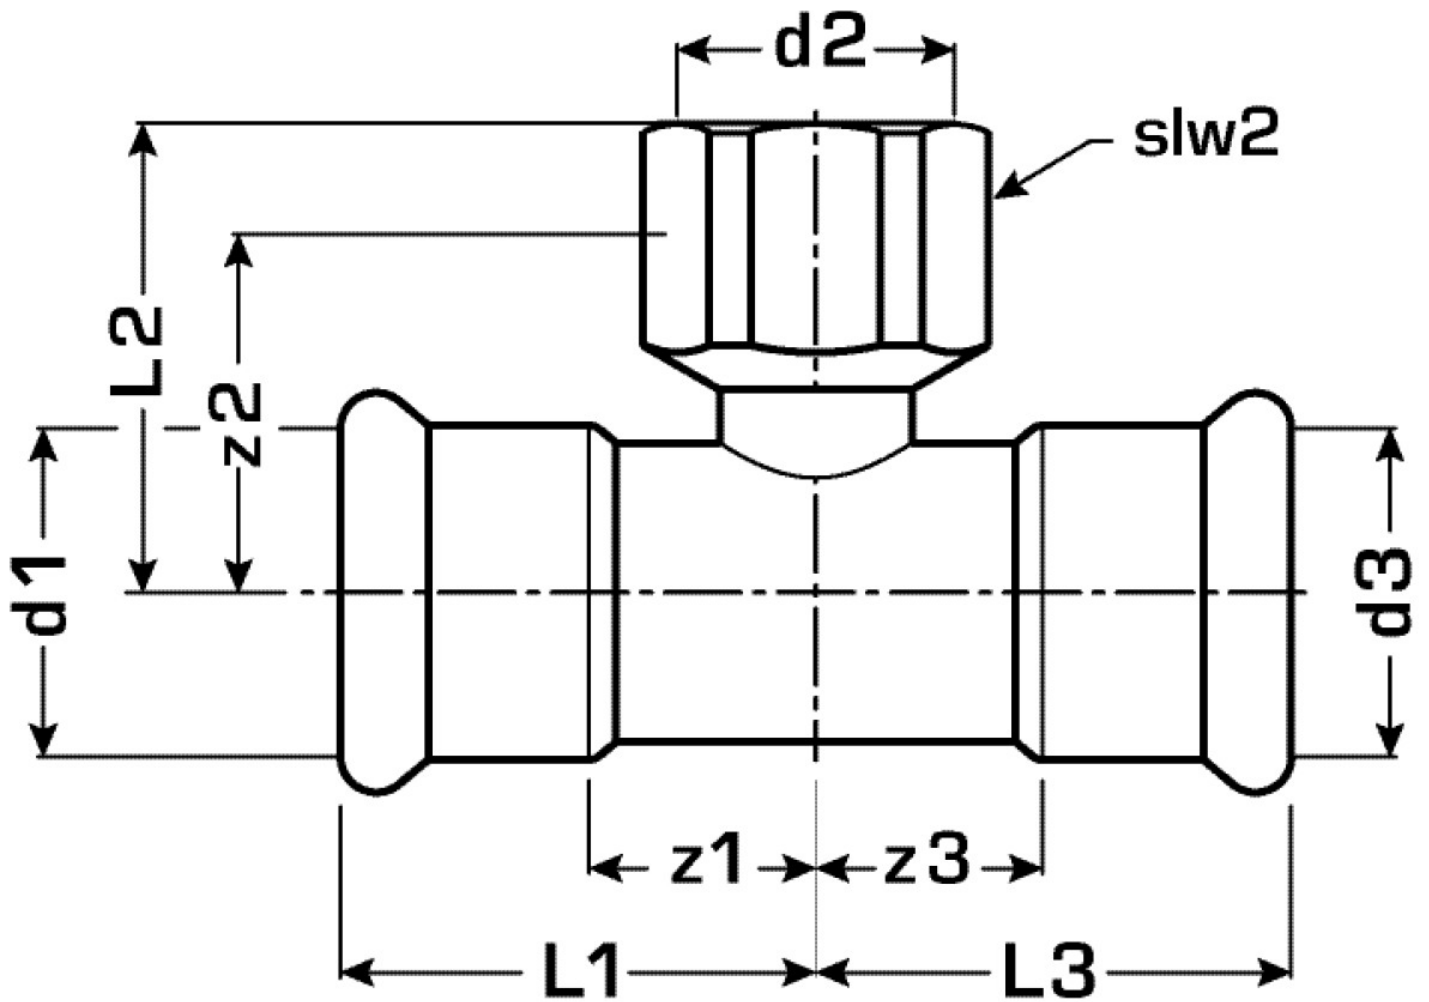

| Art. No | label | d2 | d1 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm | slw1 mm |
|---------|---------|---------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 52740E0 | 28x3/4" | 3/4 Zoll (20) | 28 | 28 | 42 | 35 | 42 | 19 | 14 | 19 | 32 |