


KELOX_{FB}

KM590E KELOX FB manifold 4 L: 275mm

7904500

Areas of application



?Feed and return flow bar with heating circuit outlets 3/4" euro cone with male thread, with bleeding at the highest point and draining, manifold ends closed, connections with pre-formed union nut 1" flat-sealing, manifold ends with 1" male thread, for screwing together individual manifold bars without additional connectors, on the feed line, pre-settable double-spindle valve, top parts to fit KM596 KELOX thermal motor, on the return flow water flow meter (0.5-2.5 l/min), non-porous metallised brass, incl. labelled plates for each heating circuit and sound-insulated metal consoles (1 circuit) without drain outlet, bleeding and metal console

Application area: tmax. 80°C/6 bar

ATTENTION: WITHOUT KM220 Euro thread fitting!

Specifications

Article information

| | |
|-------------------|---|
| extendible | 1 |
|-------------------|---|

Product information


| | |
|-------------|----------|
| VPE1 | 1,00 KT1 |
|-------------|----------|

| | |
|---------------|-----------|
| weight | 2,805 KGM |
|---------------|-----------|

| | |
|-------------|-------------------|
| text | KELOX FB manifold |
|-------------|-------------------|

| | |
|---------------|----------|
| INTRNR | 84818099 |
|---------------|----------|

| | |
|-------------|--------|
| code | KM590E |
|-------------|--------|

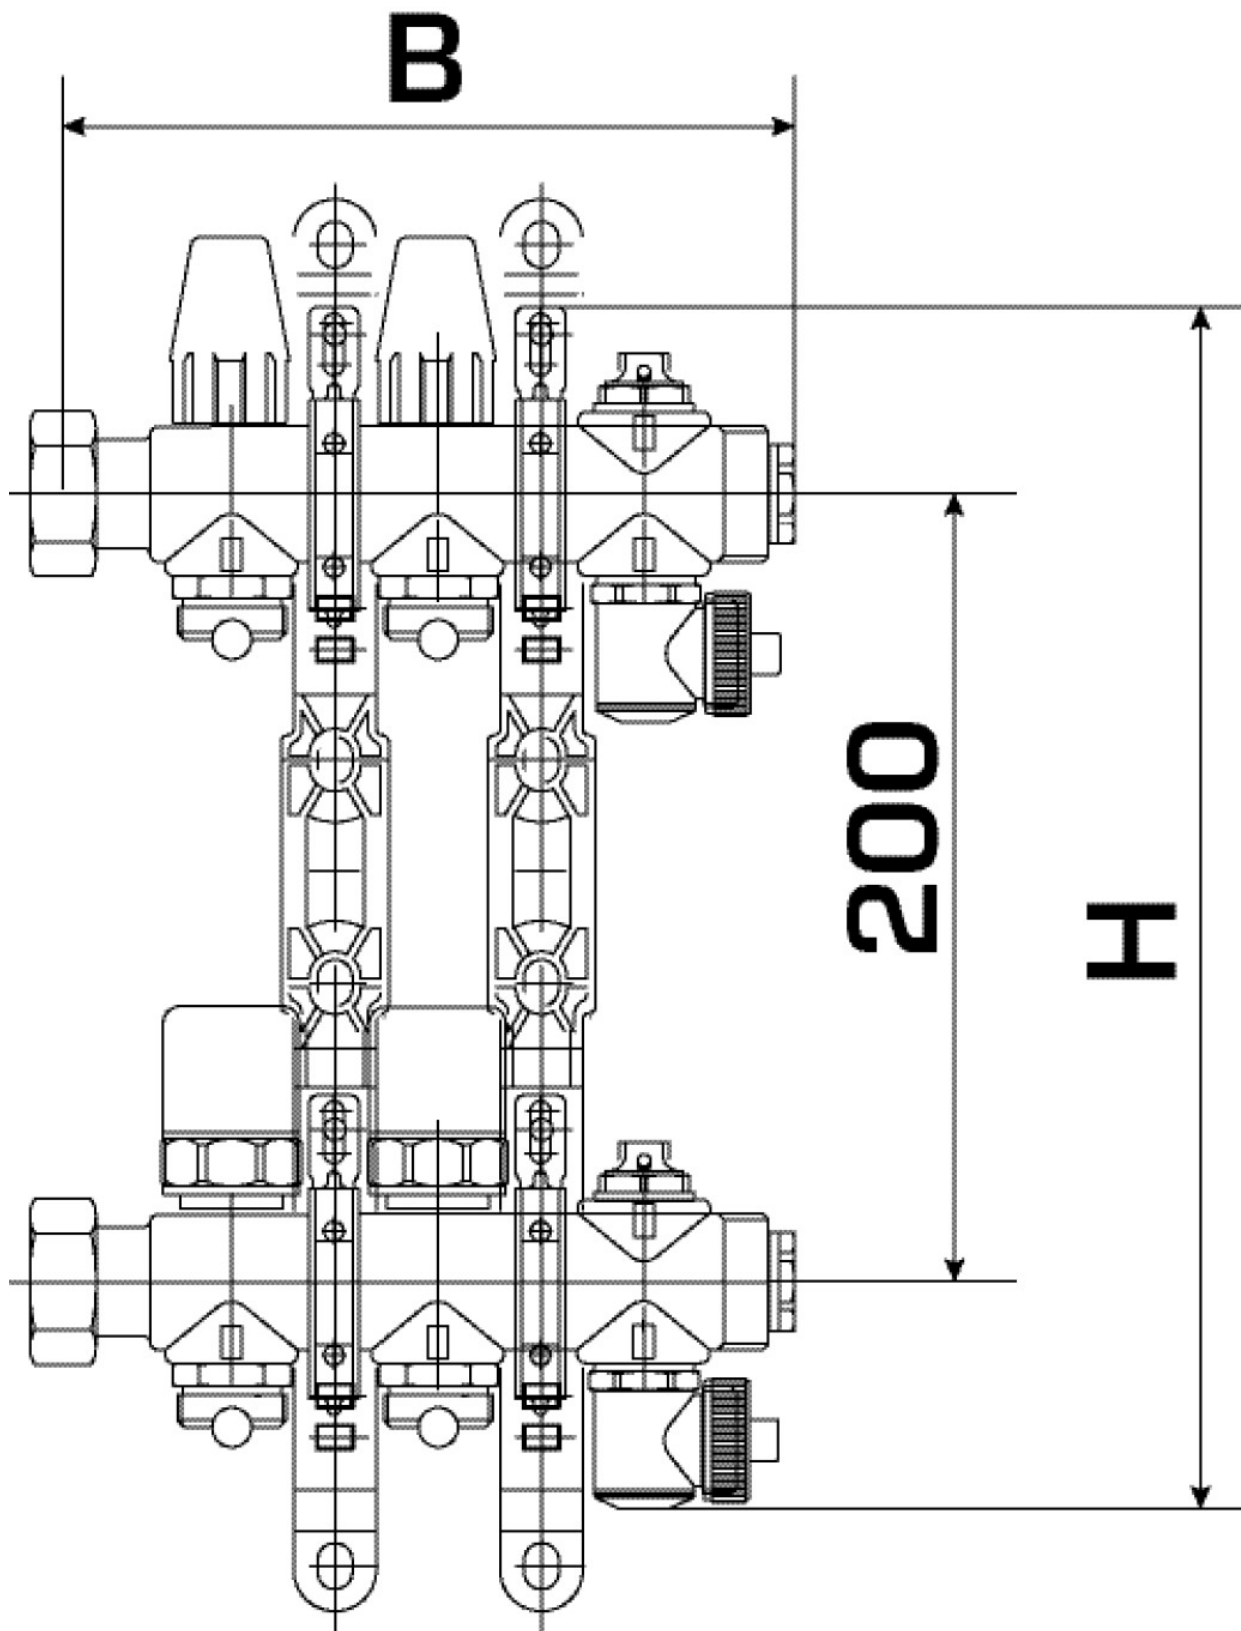

| Art. No | label | t mm | t mm | h mm |
|---------|------------|------|------|------|
| 7904500 | 4 L: 275mm | 80 | 276 | 305 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com