


# KELOX<sub>FB</sub>

## KM660 KELOX dry system element 12,5

6103010

### Areas of application

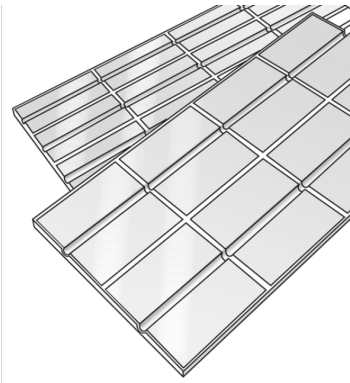

System element made from polystyrene EPS 035 DEO, 240 kPa, with 0.5 mm aluminium heat conduction plate laminated over the full surface area at the factory and omega-shaped flanged pipe channels to effectively enclose the KELOX-ULTRAX FB pipe, incl. rupture joints for exact-fitting over the full surface area of premises

VA: 12.5cm or 25cm

L: 1000mm W: 500mm H: 30mm

**ATTENTION:** to improve pressure stability, use wooden frame KM683!

# Specifications

Product information	
VPE1	10,00 KT1
VPE2	120,00 PAL
weight	1,200 KGM
text	KELOX dry system element
INTRNR	39269097
code	KM660

Art. No	label
6103010	12,5