


# KELOX<sub>FB</sub>

KM692K KELOX BUS room thermostat, digital  
86x86x26,5mm

5881520

## Areas of application

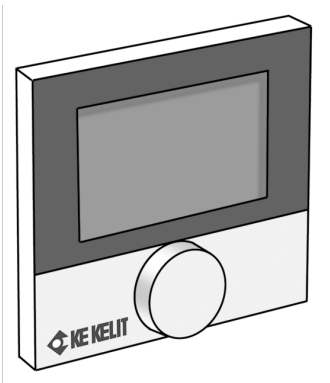

?Surface-mount bus room thermostat as a signal transmitter to the KM693 BUS connection unit and, in addition, to control 24 V thermal motors; with backlit display; can also be used for programming the KM693 connection unit, KM699 floor sensor or KC560 dew point monitor can be connected

Power supply: 24V via the mBUS of the KM693 KELOX 24V bus connection unit

Hysteresis: +/- 0.3 K

Setting range: 5°C - 30°C

Protection type/class: IP 20

Size: 86x86x26.5mm

Colour: white (RAL 9003)



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

ATTENTION: Can only be operated in conjunction with the KM693 24V connection unit!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

Product information	
VPE1	1,00 KT1
VPE2	50,00 KT2
weight	0,110 KGM
text	KELOX BUS room thermostat, digital
INTRNR	90321020
code	KM692K

Art. No	label
5881520	86x86x26,5mm