


KELOX_{FB}

KMP590Z KELOX-PROTEC FB stainless steel push fitting manifold, 10bar 3 L: 275mm

73173030

Areas of application

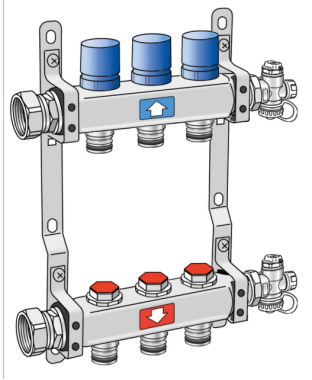

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow shut-off valve, incl. sound-insulated steel consoles

Application area: tmax. 70°C/10 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Article information

extendible 1

Product information

VPE1 1,00 KT1

VPE2 119,00 PAL

weight 2,450 KGM

text KELOX-PROTEC FB stainless steel push fitting manifold, 10bar

INTRNR 84818099

code KMP590Z




KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

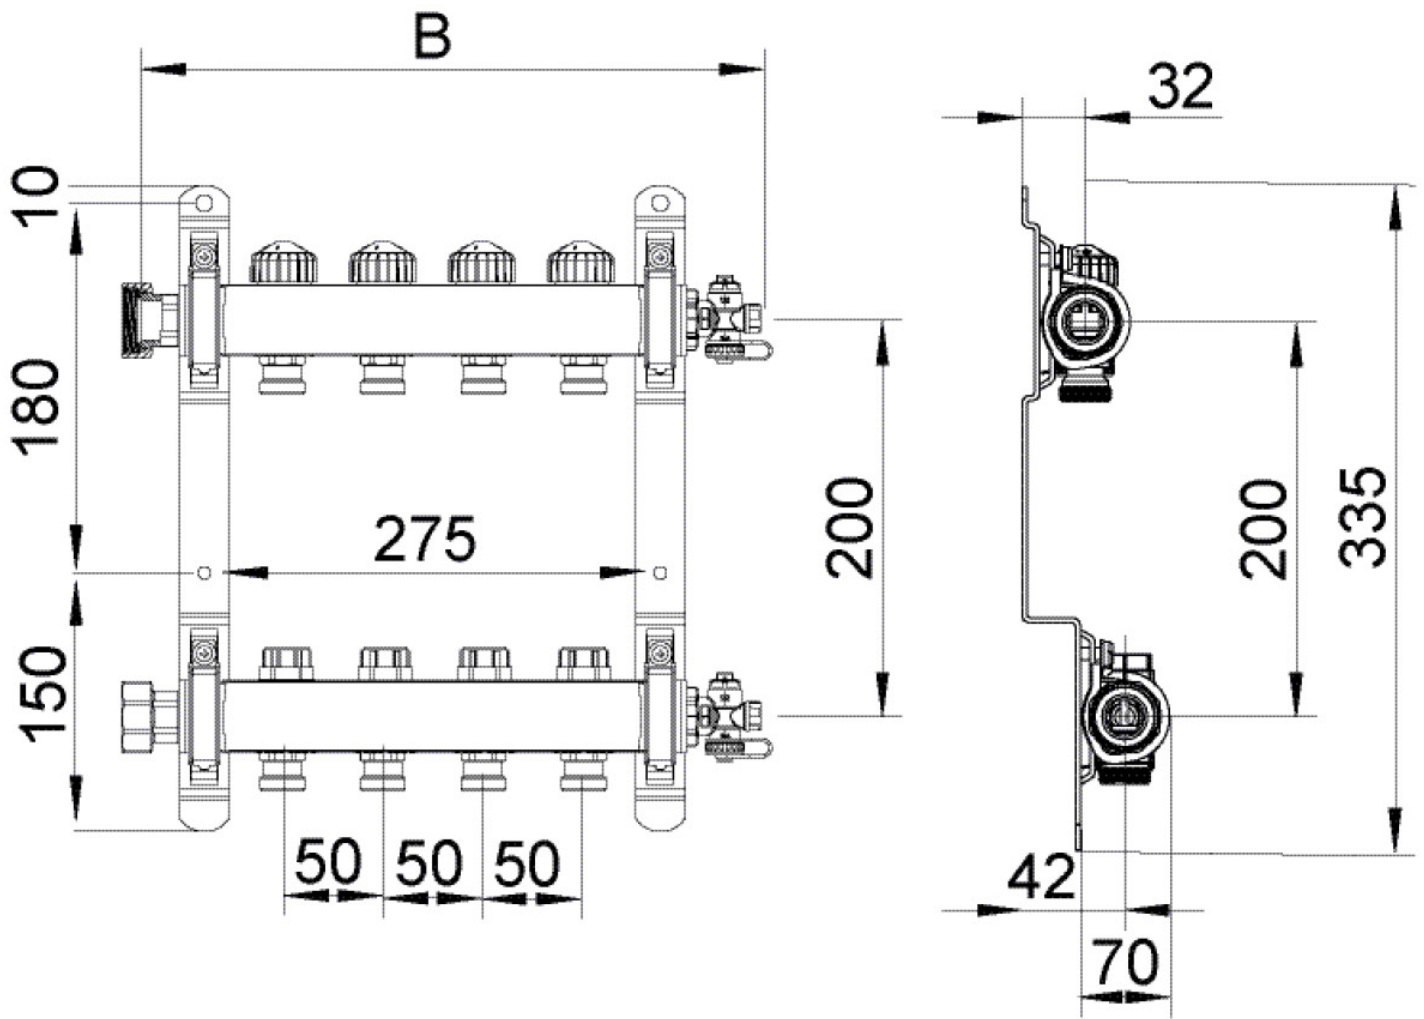

Art. No	label	t mm	t mm	h mm
73173030	3 L: 275mm	80	275	305