


# KELOX<sub>FB</sub>

KMP590Z KELOX-PROTEC FB stainless steel push fitting manifold, 10bar 7 L: 475mm

73173070

## Areas of application

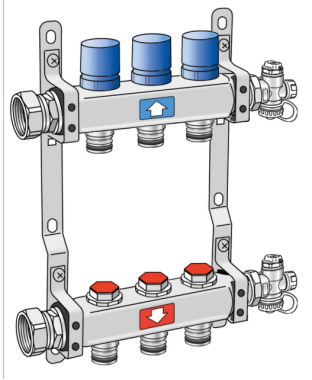

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow shut-off valve, incl. sound-insulated steel consoles

Application area: tmax. 70°C/10 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

# Specifications

## Article information

**extendible** 1

## Product information

**VPE1** 1,00 KT1


**VPE2** 63,00 PAL

**weight** 4,070 KGM

**text** KELOX-PROTEC FB stainless steel push fitting manifold, 10bar

**INTRNR** 84818099

**code** KMP590Z

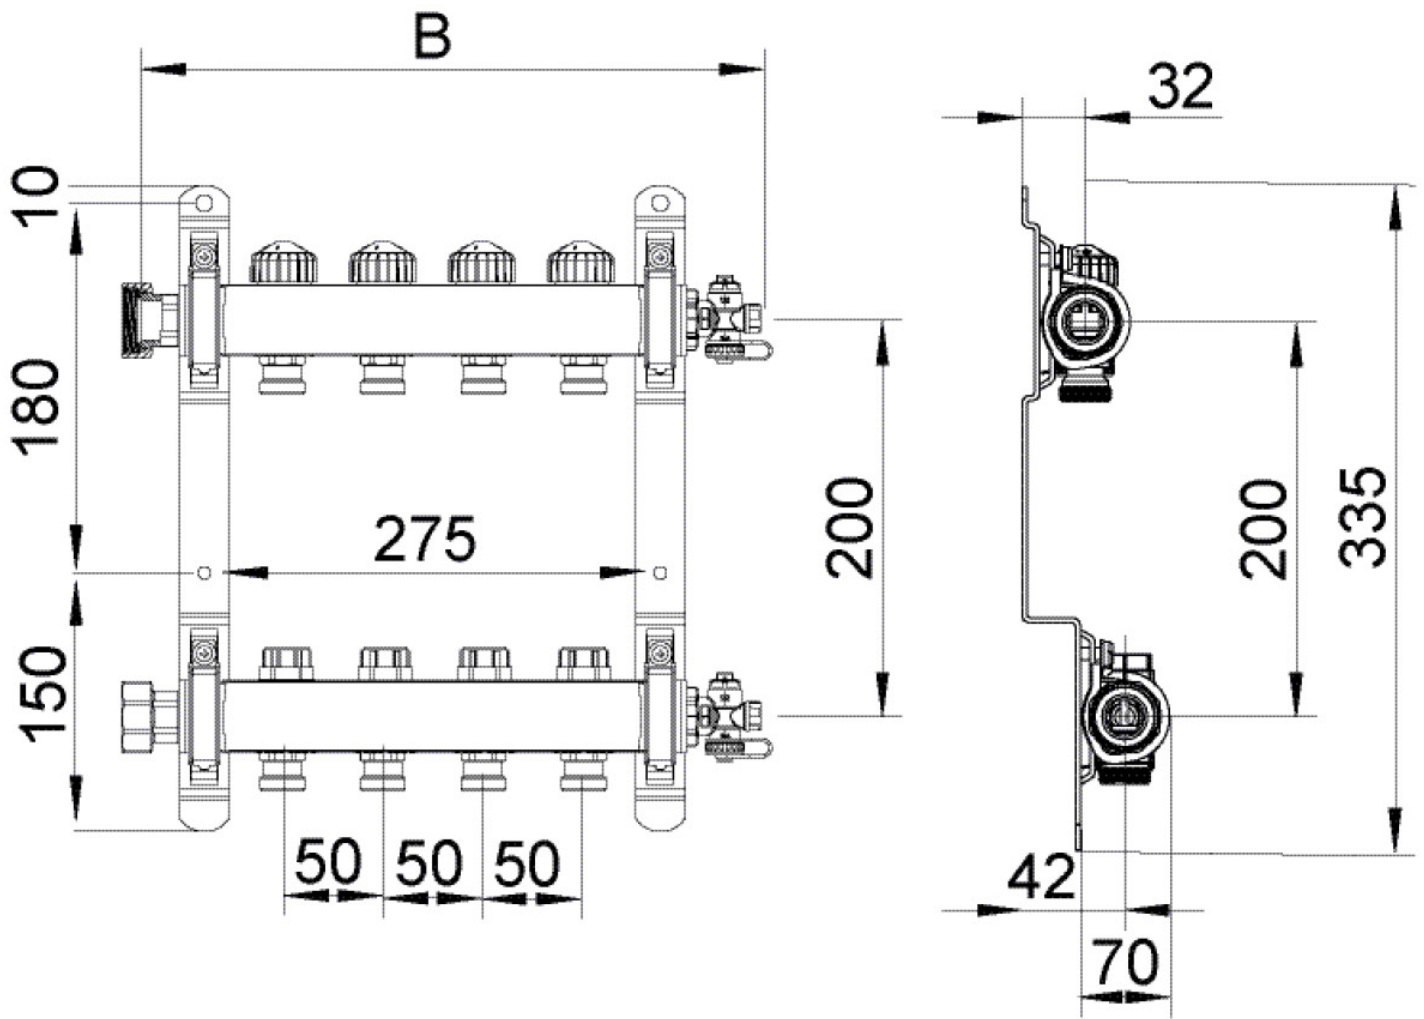

Art. No	label	t mm	t mm	h mm
73173070	7 L: 475mm	80	475	305