


KELOX_{FB}

KM636T KELOX FB hybrid Velcro staple roll,
Supersilent 30/2 hybrid roll 6.5KN/m²

6060520

Areas of application

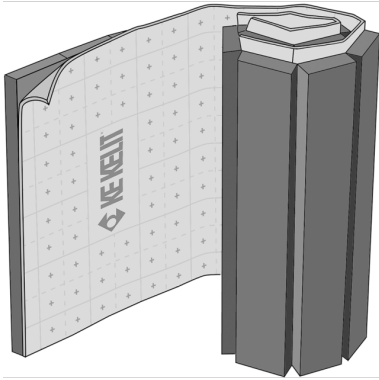

expanded polystyrene rigid foam board for stapling or adhesion, on approved insulation layers installed on site

Top 6mm PE foam film with Velcro non-woven lining for Velcro fastening of KELOX-ULTRAX FB Velcro tubes and ULTRA PE-RT Velcro tubes

or for stapling KELOX-ULTRAX FB, ULTRA PE-RT pipes using KM611 staples, with infrared reflectors, HFC- and CFC-free, incl. adhesive overlap edge.

"Super Silent" version

Thickness: 30mm (24mm EPS-T plus +6 mm PE foam film)

Load-bearing capacity: max. 6.5KN/m²



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Dynamic rigidity Lambda value thermal conductivity: 0.033W/mK.

Impact sound improvement measure: 33 dB

Water vapour diffusion equivalent air layer thickness -sd-value: approx.35m

Compressibility: 2mm

Supplied in coils: 12x1m

ATTENTION: Protect from direct sunlight, do not store outdoors!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information	
VPE1	12,00 SA1
VPE2	84,00 PAL
weight	3,650 KGM
text	KELOX FB hybrid Velcro staple roll, Supersilent
INTRNR	39211100
code	KM636T

Art. No	label
6060520	30/2 hybrid roll 6.5KN/m ²