


KELOX_{FB}

KMP590M KELOX-PROTEC FB push fitting manifold 12 L: 675mm

73174120

Areas of application

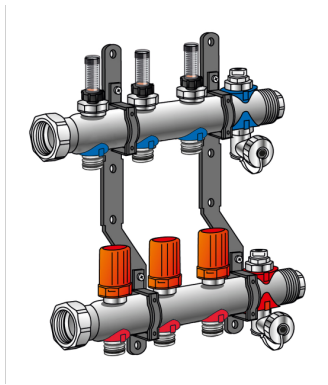

?Feed and return flow bar with pluggable heating circuit outlets, with bleeding at the highest point and draining, manifold ends closed, connections with pre-formed union nut 1" flat-sealing, manifold ends with 1" male thread, for screwing together individual manifold bars without additional connectors, on the feed line, pre-settable double-spindle valve, top parts to fit KM596 KELOX thermal motor, on the return flow water flow meter (0.5-2.5 l/min), non-porous metallised brass, incl. labelled plates for each heating circuit and sound-insulated metal consoles (1 circuit) without drain outlet, bleeding and metal console

Application area: tmax. 80°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Article information

extendible 1

Product information


VPE1 1,00 KT1

weight 6,354 KGM

text KELOX-PROTEC FB push fitting manifold

INTRNR 84818099

code KMP590M

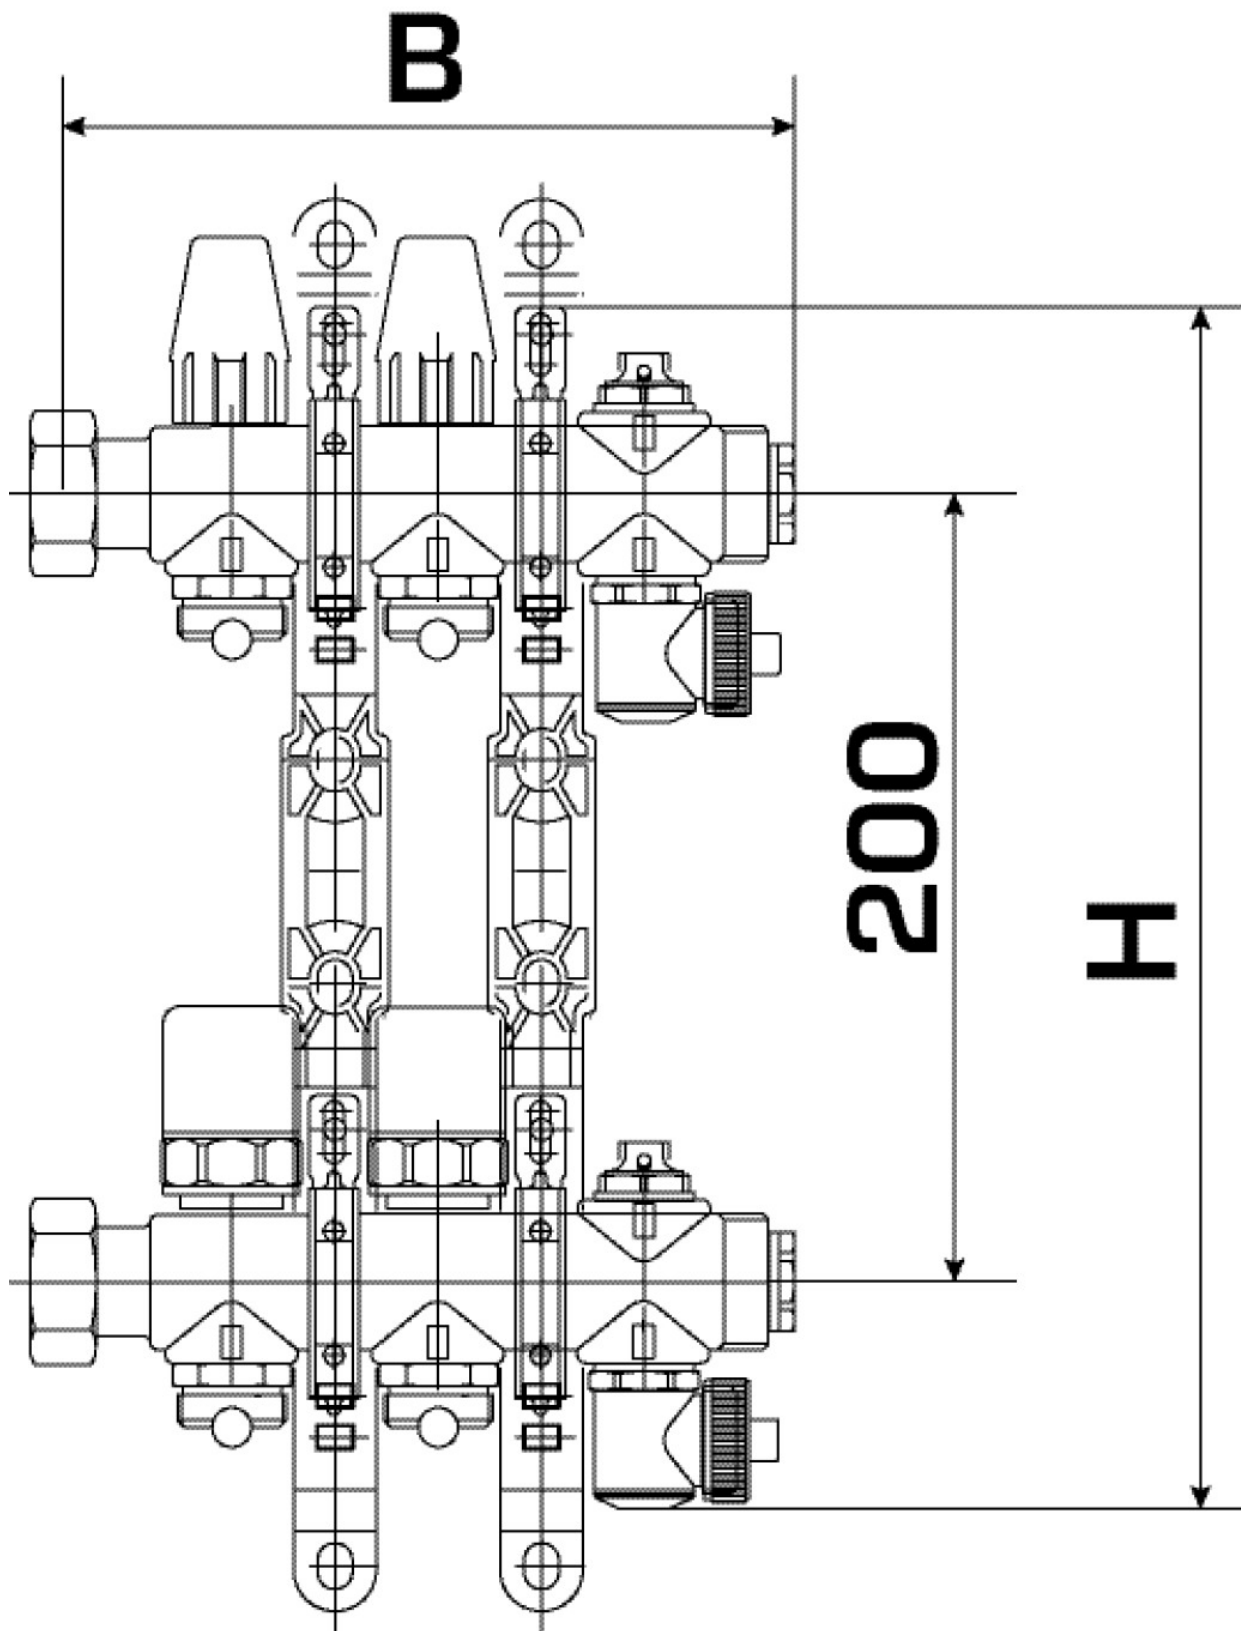

| Art. No | label | t mm | t mm | h mm |
|----------|-------------|------|------|------|
| 73174120 | 12 L: 675mm | 80 | 676 | 305 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com