


# KELOX<sub>FB</sub>

KM696K KELOX Smart room thermostat, digital  
86x86x26mm

5882010

## Areas of application

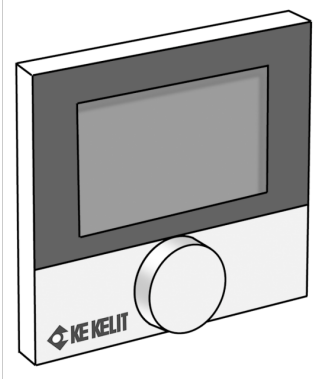

Surface-mount digital wireless room thermostat with backlit display as a signal transmitter to the KM696H or KM696HK connection unit and, in addition, to control 230V thermal motors; can be operated via smartphone app (only in combination with KM696G Gateway), connection option for KM699 floor sensor or KC560 dew point monitor

Hysteresis: +/-0.5 K

Setting range: 5°C - 30°C

Protection type/class: IP20

Radio technology: 868.3 and 869.525 MHz SRD band

Radio free field range: 270m

Power supply: 2 x LR06/AA alkaline batteries (included)

Size: 86x86x26mm

Colour: White (RAL 9003)

ATTENTION: Operation only in conjunction with the KM696H or KM696HK



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

Product information	
VPE1	1,00 KT1
VPE2	54,00 KT2
weight	0,105 KGM
text	KELOX Smart room thermostat, digital
INTRNR	90321020
code	KM696K

Art. No	label
5882010	86x86x26mm