


# KELOX<sub>FB</sub>

KM696HK KELOX Smart connection unit,  
heating/cooling 230V

5882070

## Areas of application

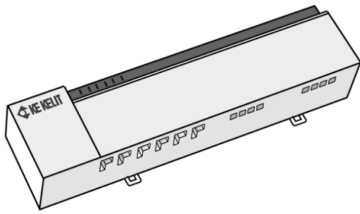

For connecting up to max. 6 room thermostats and for up to 10 thermal motors, for heating and cooling, switch outputs with the following functions: Pump logic, boiler control, as well as CO pilot, connection options for CO input (potential-free) and KC560 dew point monitor, can be operated via smartphone app (only in connection with KM696G gateway) or via room device KM696K

Operating voltage: 230V AC 50 Hz

Wireless frequency: 868.3 and 869.525 MHz SRD band

Radio free field range: 270m

Size: 290x52x75mm

Colour: Light grey (RAL 7035)



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

Product information	
VPE1	1,00 KT1
VPE2	15,00 KT2
weight	0,830 KGM
text	KELOX Smart connection unit, heating/cooling
INTRNR	90321020
code	KM696HK

Art. No	label
5882070	230V