


# KELOX<sub>FB</sub>

KMP590D KELOX-PROTEC FB regulating push fitting manifold 11 L: 675mm

73172110

## Areas of application

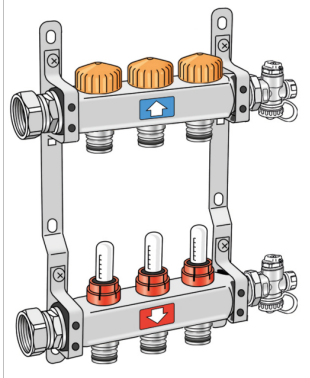

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Automatic flow control and hydraulic balancing of the individual return flow valves, suitable for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including soundproofed steel consoles

Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

# Specifications

## Product information

<b>VPE1</b>	1,00 KT1
<b>VPE2</b>	49,00 PAL
<b>weight</b>	5,760 KGM
<b>text</b>	KELOX-PROTEC FB regulating push fitting manifold
<b>INTRNR</b>	84818099
<b>code</b>	KMP590D




**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

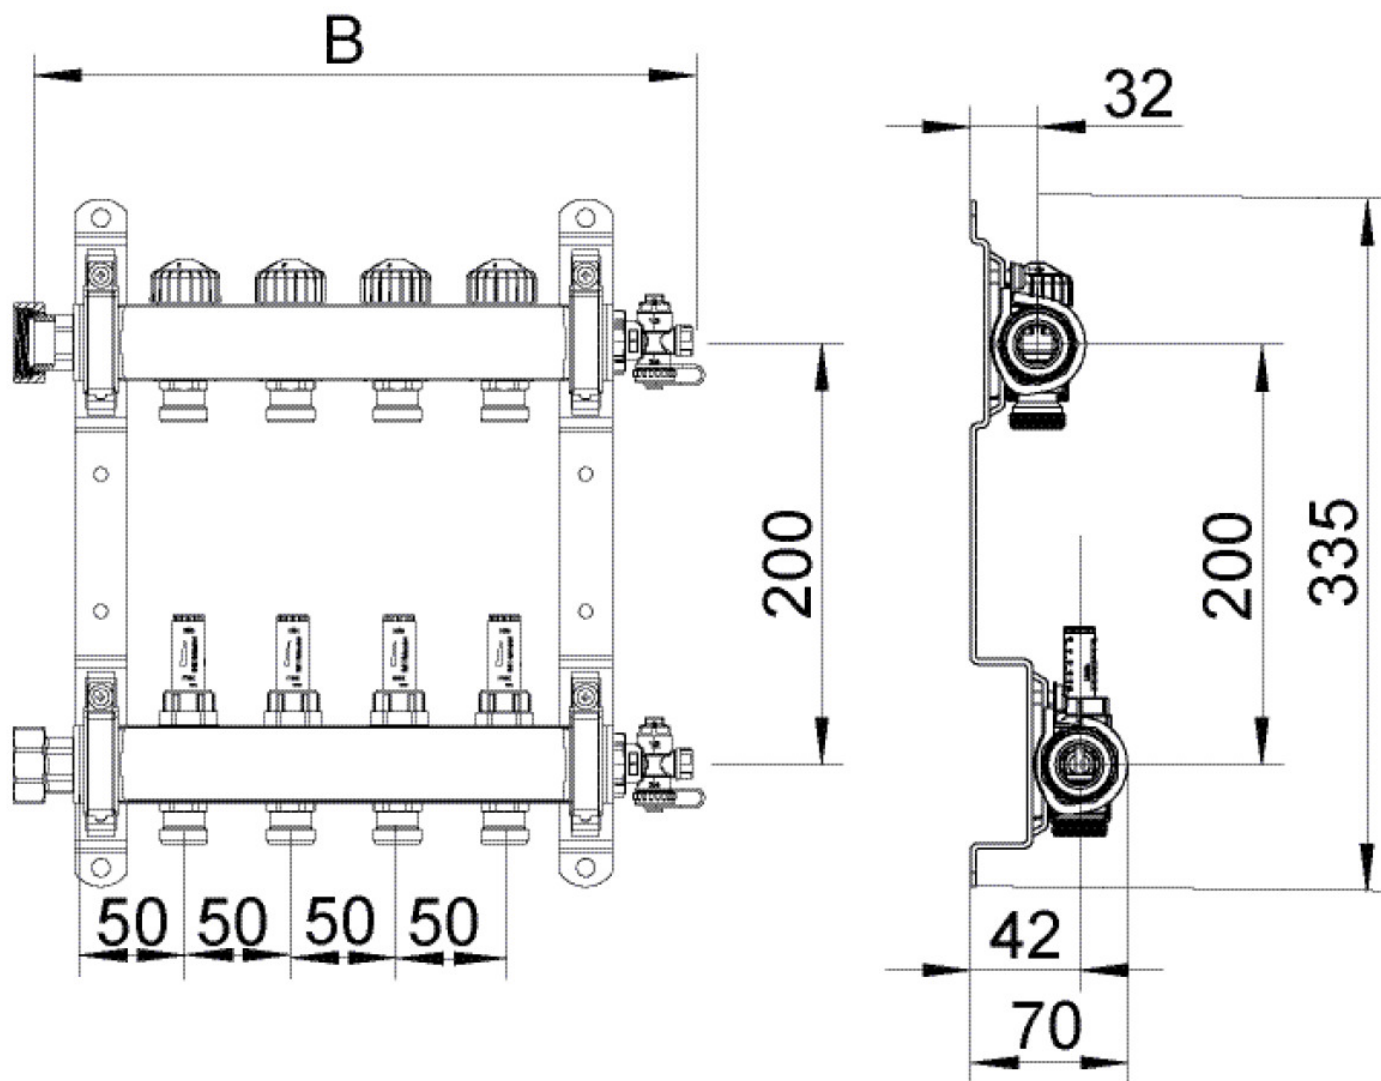

Art. No	label	t mm	t mm	h mm
73172110	11 L: 675mm	70	475	336