


KELOX_{FB}

?KELOX-ULTRAX FB manifold 11 L: 675mm

7911600

Felhasználási terület

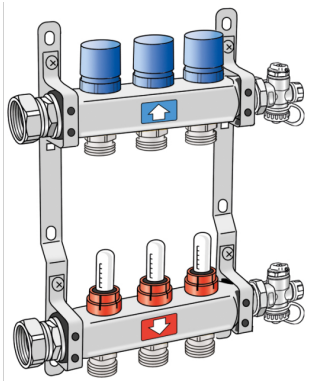

?Stainless steel flow and return flow bar with 3/4" male Euro cone heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including soundproofed steel consoles
Application area: tmax. 70°C/6 bar

ATTENTION – WITHOUT KM220 Euro screw connection!

Specifikáció

Termékinformációk

Szöveg

?KELOX-ULTRAX FB manifold

