


KM100 KELOX multilayer pipe 20x2.25/50

75212050

Areas of application

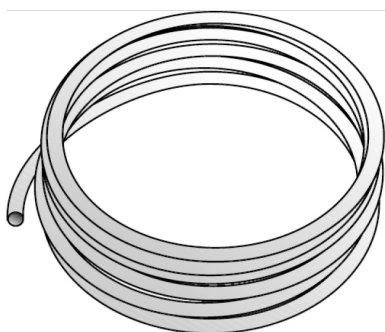

KELOX multilayer pipe conforming to ÖNORM EN ISO 21003; oxygen- and water vapour-tight 5-layer multilayer pipe made of PE-RT/Al/ PE-RT;

Classification of operating conditions according to ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Colour: white/transparent

Supplied in coils

Approvals:



Specifications

Article information

color weiß

flexible 1

Technical properties

maximum working pressure at 20 ° C 10 bar

pipe weight 0,15 kg/m

lambda pipe 0,45 W/(m.K)

Product information

VPE1 50 ROL

VPE2 250 KT1

VPE3 1000 PAL

L 50 m

weight 0,15 KGM

text KELOX multilayer pipe

INTRNR 39173900

main material group KELOX

material group KELOX pipes

code KM100



Art. No	label
75212050	20x2.25/50



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com