


KELOX_{FB}

KELOX Control room thermostat, digital
86x86x31mm

5881140

Areas of application

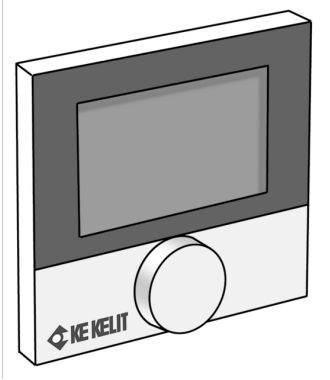

Surface-mount room thermostat with backlit display for controlling 1 to 5 230V thermal motors (maximum of 3 W per thermal motor), for heating and cooling with changeover input, self-learning control system with selectable time-switching programs, connection option for KM699 floor sensor or KC560 dew point monitor

Operating voltage: 230V AC 50 Hz

Hysteresis: +/- 0.5 K at 17-24°C

Contact: 1 NCC

Setting range: 5°C - 30°C

Protection type/class: IP 20



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Size: 86x86x31mm

Colour: white (RAL 9003)

Compatible with KM691 connection unit!

ATTENTION: Only in conjunction with KM596 KELOX thermal motor 230V!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information

text KELOX Control room thermostat, digital

Art. No

5881140

label

86x86x31mm