


# KELEN

## KE06 KELEN ALU-composite pipe - PN20 90x12.3

1659001

### Areas of application

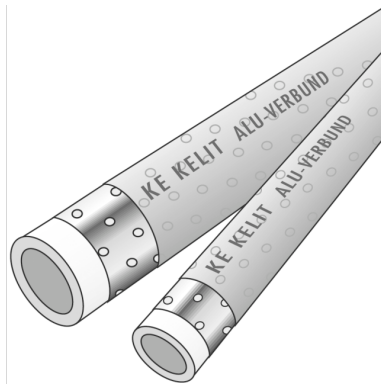

KELEN ALU - composite pipe conforming to ÖNORM EN ISO 15874, made of polypropylene copolymer (PP-R), mechanically stabilising aluminium pipe attached to the outer wall of the medium pipe with a bonding agent and protective layer

Application area: 20°C/20 bar - 70°C/8 bar

Colour: medium pipe is of natural colour, protection layer is grey

Length: 4m

## Approvals:



# Specifications

## Article information

color blau

trade length 4 m

## Technical properties

maximum working pressure at 20 ° C 20 bar

pipe weight 3,15 kg/m

pipe contents 3,36 l/m

lambda pipe 0,24 W/(m.K)

wall rawness 0,007 mm

expansion coefficient 0,035 mm/(m.K)

## Product information

DIM2 65,4

VPE1 4,00 BND

L 4 m

weight 3,150 KGM


text KELEN ALU-composite pipe - PN20

INTRNR 39172290

main material group KELEN

material group KELEN pipes

code KE06

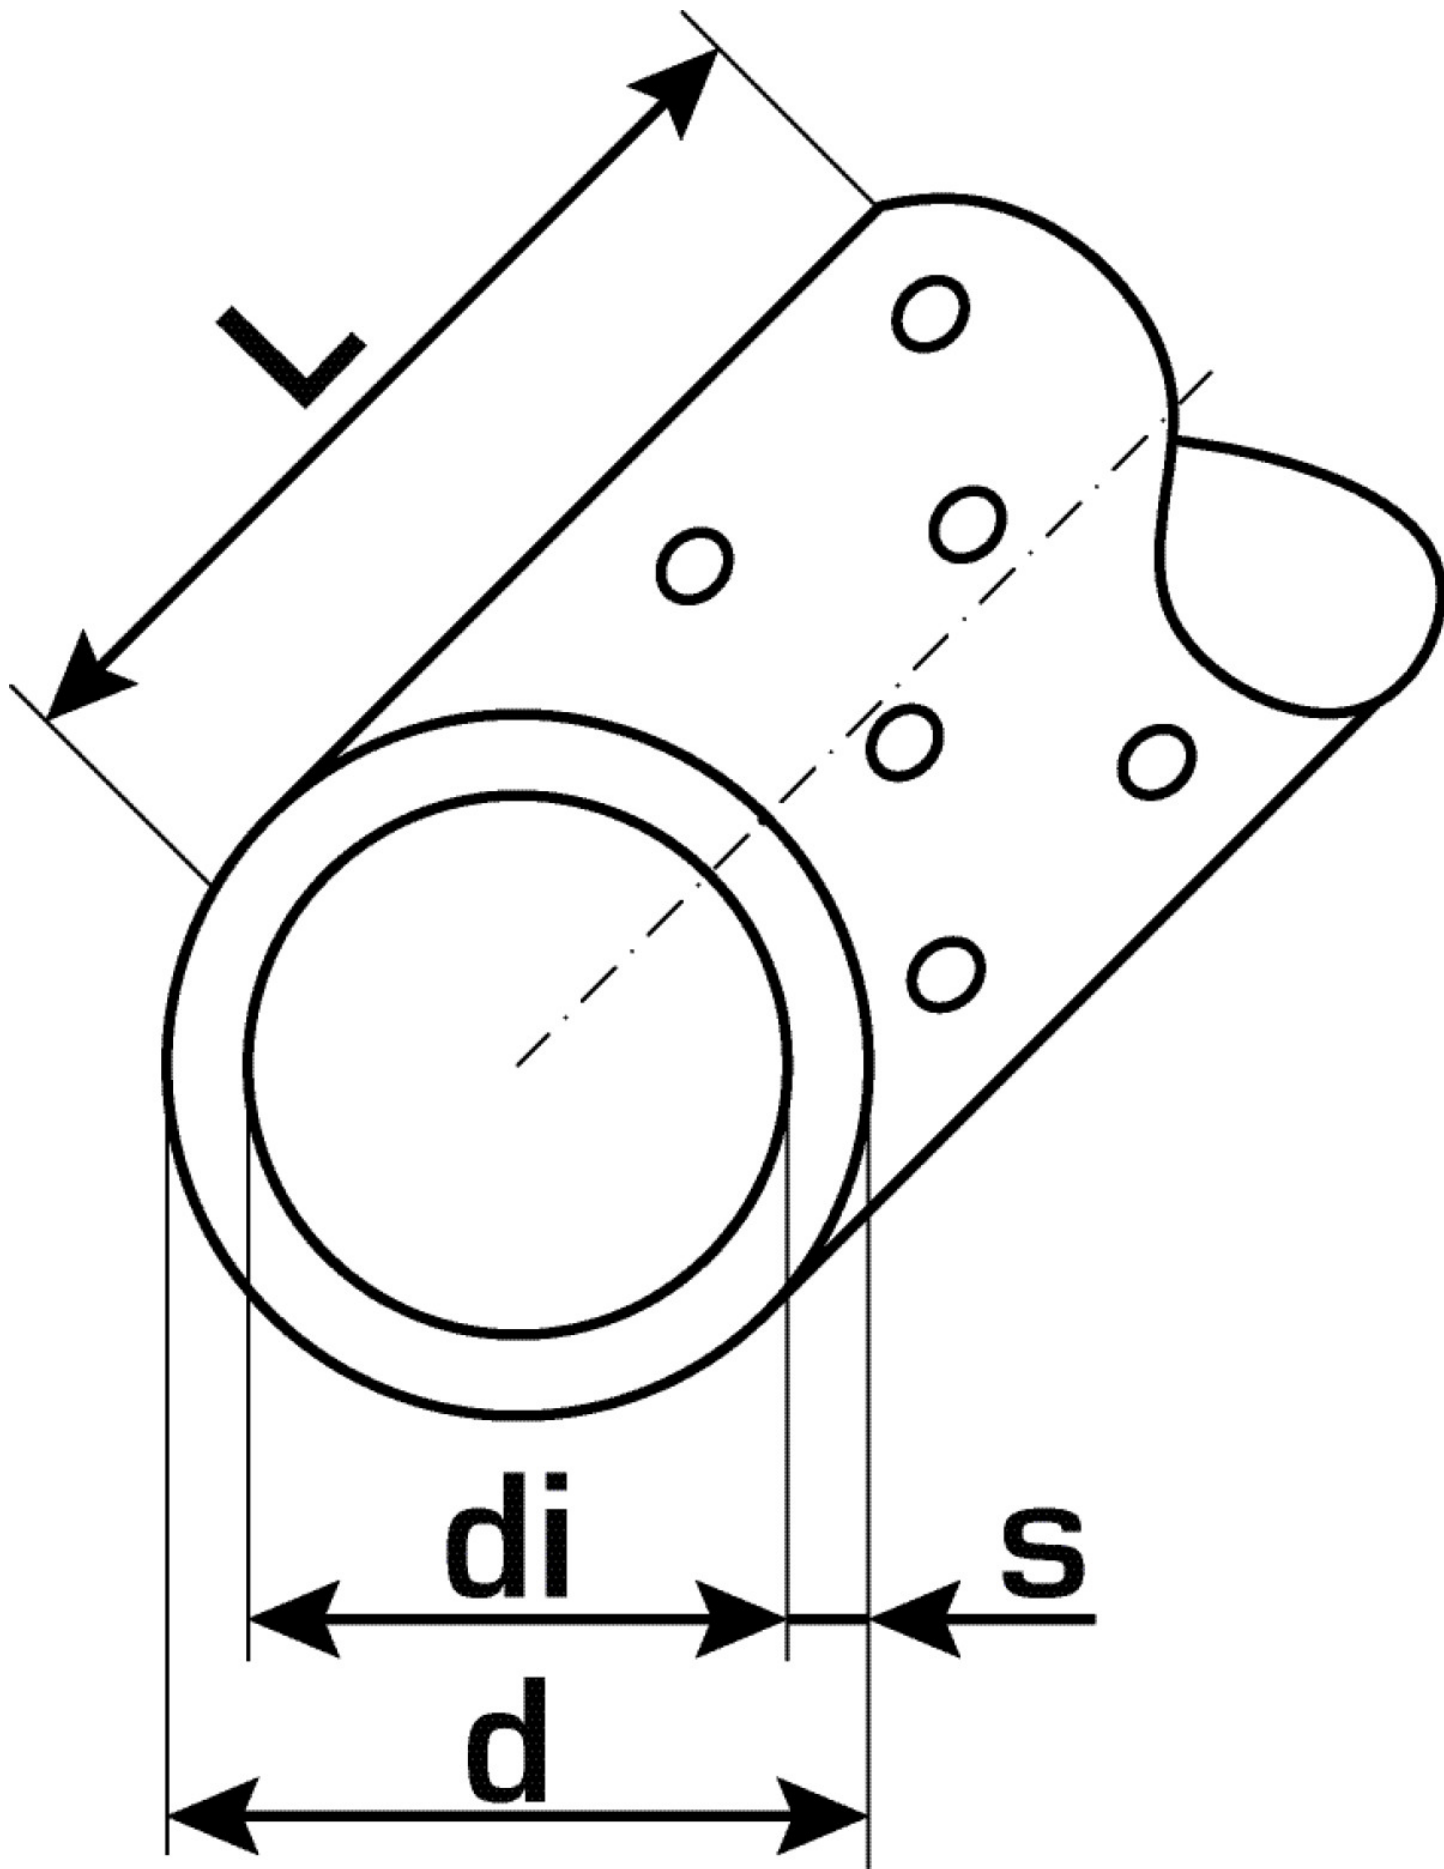

| Art. No | label   | d1 mm | pipe contents l/m | s mm |
|---------|---------|-------|-------------------|------|
| 1659001 | 90x12.3 | 90    | 3,36              | 12,3 |