


# KETRIX

## TRI08 KETRIX industrial pipe - PN16 20x2.8

55008D00

### Areas of application

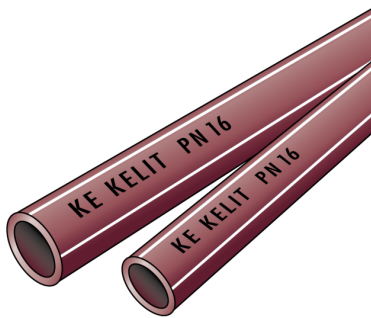

KETRIX industrial piping system based on ÖNORM EN ISO 15874 made of polyolefin blend (POB) for COOLING WATER, COLD and COMPRESSED AIR up to 10 bar

Area of application: 20°C/16 bar, from -30°C to +40°C/10 bar

Colour: burgundy with 3 co-extruded white longitudinal lines

Length: 4m

# Specifications

## Article information

port 1	Pipe end
port 2	Pipe end
color	Burgundy

## Technical properties

pipe weight	0,15 kg/m
pipe contents	0,16 l/m
PN	PN 16
lambda pipe	0,24 W/(m.K)
wall rawness	0,007 mm
expansion coefficient	0,14 mm/(m.K)

## Product information

<b>DIM2</b>	14,4
<b>VPE1</b>	80,00 BND
<b>VPE2</b>	6400,00 HOB
<b>L</b>	4 m
<b>weight</b>	0,156 KGM
<b>text</b>	KETRIX industrial pipe - PN16
<b>INTRNR</b>	39172290
<b>main material group</b>	KETRIX
<b>material group</b>	KETRIX pipes
<b>code</b>	TRI08



Art. No	label	d1 mm	pipe contents l/m	s mm
55008D00	20x2.8	20	0,16	2,8



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)