


KETRIX

TRI08 KETRIX industrial pipe - PN16 20x2.8

55008D00

Areas of application

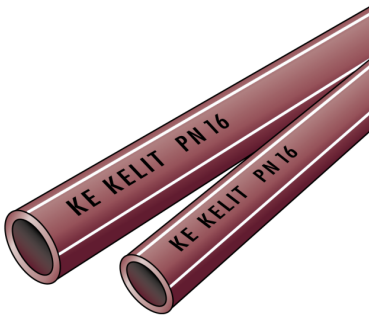

KETRIX industrial piping system based on ÖNORM EN ISO 15874 made of polyolefin blend (POB) for COOLING WATER, COLD and COMPRESSED AIR up to 10 bar

Area of application: 20°C/16 bar, from -30°C to +40°C/10 bar

Colour: burgundy with 3 co-extruded white longitudinal lines

Length: 4m

Specifications

Article information

| | |
|---------------|----------|
| port 1 | Pipe end |
| port 2 | Pipe end |
| color | Burgundy |

Technical properties

| | |
|------------------------------|---------------|
| pipe weight | 0,15 kg/m |
| pipe contents | 0,16 l/m |
| PN | PN 16 |
| lambda pipe | 0,24 W/(m.K) |
| wall rawness | 0,007 mm |
| expansion coefficient | 0,14 mm/(m.K) |

Product information

| | |
|----------------------------|-------------------------------|
| DIM2 | 14,4 |
| VPE1 | 80,00 BND |
| VPE2 | 6400,00 HOB |
| L | 4 m |
| weight | 0,156 KGM |
| text | KETRIX industrial pipe - PN16 |
| INTRNR | 39172290 |
| main material group | KETRIX |
| material group | KETRIX pipes |
| code | TRI08 |



| Art. No | label | d1 mm | pipe contents l/m | s mm |
|----------|--------|-------|-------------------|------|
| 55008D00 | 20x2.8 | 20 | 0,16 | 2,8 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com